
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

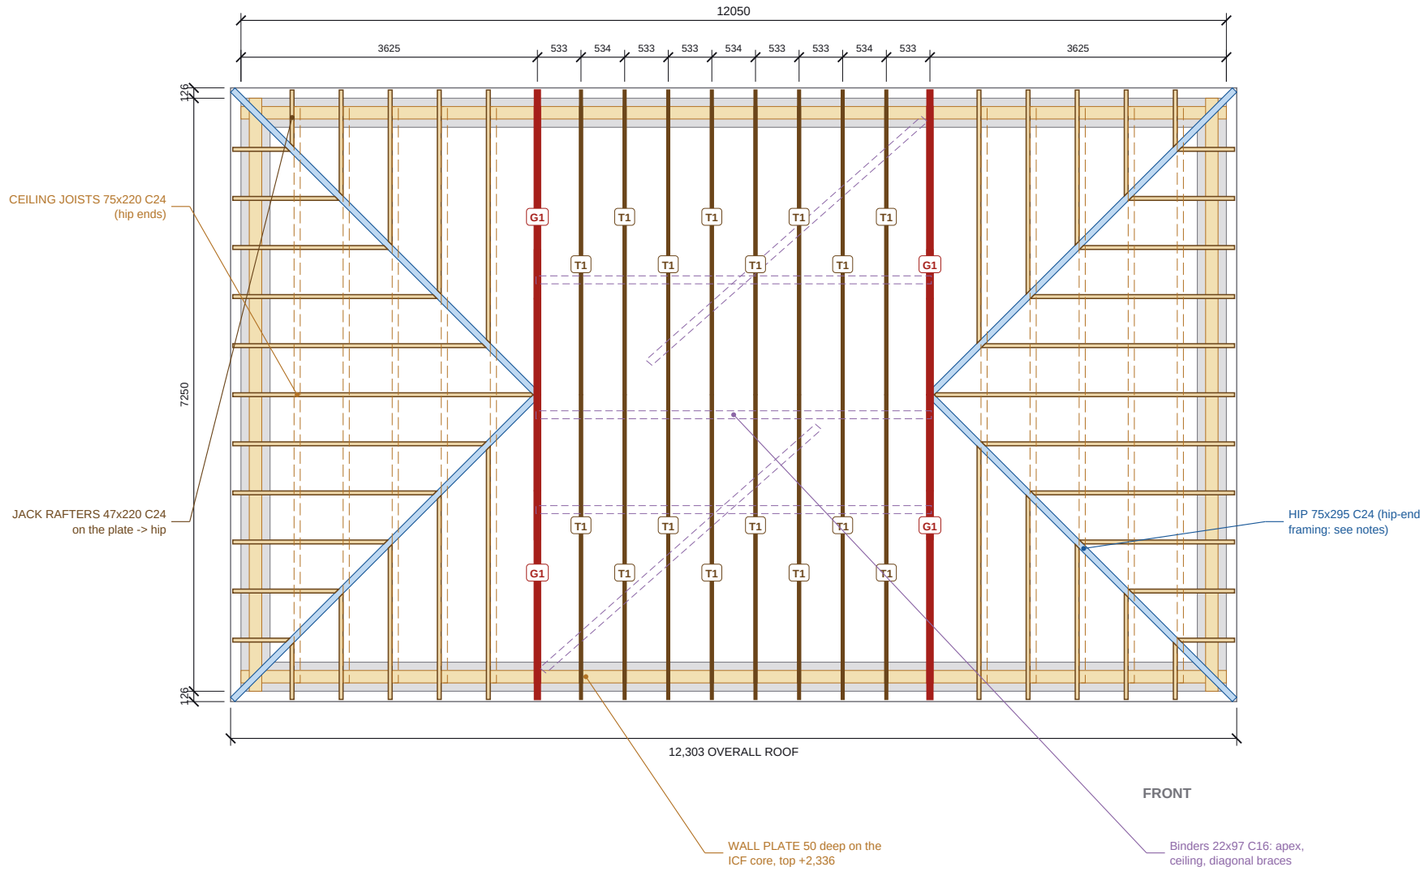

ROOF STRUCTURE PLAN

Scale 1:75 @ A3 | Plan on the roof structure, tiles / battens / membrane omitted

Girder truss (type G)
Crown / jack rafter
Wall plate on the ICF core
Trussed rafter (type T)
Ceiling joist (hip end)
ICF walls (outline)
Hip
Binder / diagonal brace

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

ROOF STRUCTURE SCHEDULES

TRUSS SCHEDULE

Type	Description	Bottom chord	Top chord	Qty
T1	Fink (W) 30 deg, duo-pitch	7,047	35x97 TR26	8
G1	2-ply girder (Fink) 30 deg	7,047	2/35x97 TR26	2
	Total trusses			**10**

Profiles, spans, rise and member sizes on ES26-080-RF-06.

LOOSE ROOF TIMBER

Item	Section	Length	Qty
Binder / diagonal brace	22x97 C16	4,806-4,835	5
Ceiling joist (hip end)	75x220 C24	7,047	10
Crown rafter	47x220 C24	4,301	2
Hip	75x295 C24	5,690	4
Jack rafter (hip end)	47x220 C24	837-3,608	40

ROOF METALWORK

Item	Qty
Truss clip to plate (TCP38)	16
Girder clip to plate (TCP50)	4
Girder hanger, hip head onto the girder (THA75)	4

NOTES

1. Hip roof as modelled for the quotation (TLS roof framer): two 2-ply girder trusses at the hip ends, Fink trusses between them at 533 c/c, 30 deg, on a 50 deep timber wall plate bedded on the ICF core all round, plate top +2,336 above GF FFL.
2. Hip ends (Tom 19.10: girder + jack TRUSSES): the model frames each hip end loose - hip beams 75x295, crown and jack rafters 47x220 seated on the plate and the girder, ceiling joists 75x220 - as a stand-in for the manufacturer's girder + jack truss package (mono jack trusses hung on the girder in shoes). The truss manufacturer designs the hip-end trusses, girders, shoes and bracing to BS EN 1995-1-1; for pricing only.
3. Truss clips TCP38 at every bearing. Binders and diagonal braces as shown. All levels above GF FFL. Dimensions in mm.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE
T02 BUNGALOW - HIP ROOF LAYOUT

Girder trusses, Fink trusses, hip ends (hips, crowns, jacks, ceiling joists), binders

SCALE	SIZE	DATE
AS SHOWN	A3	19.10.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-RF-05	Q01