

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.


QUOTATION - NOT FOR CONSTRUCTION

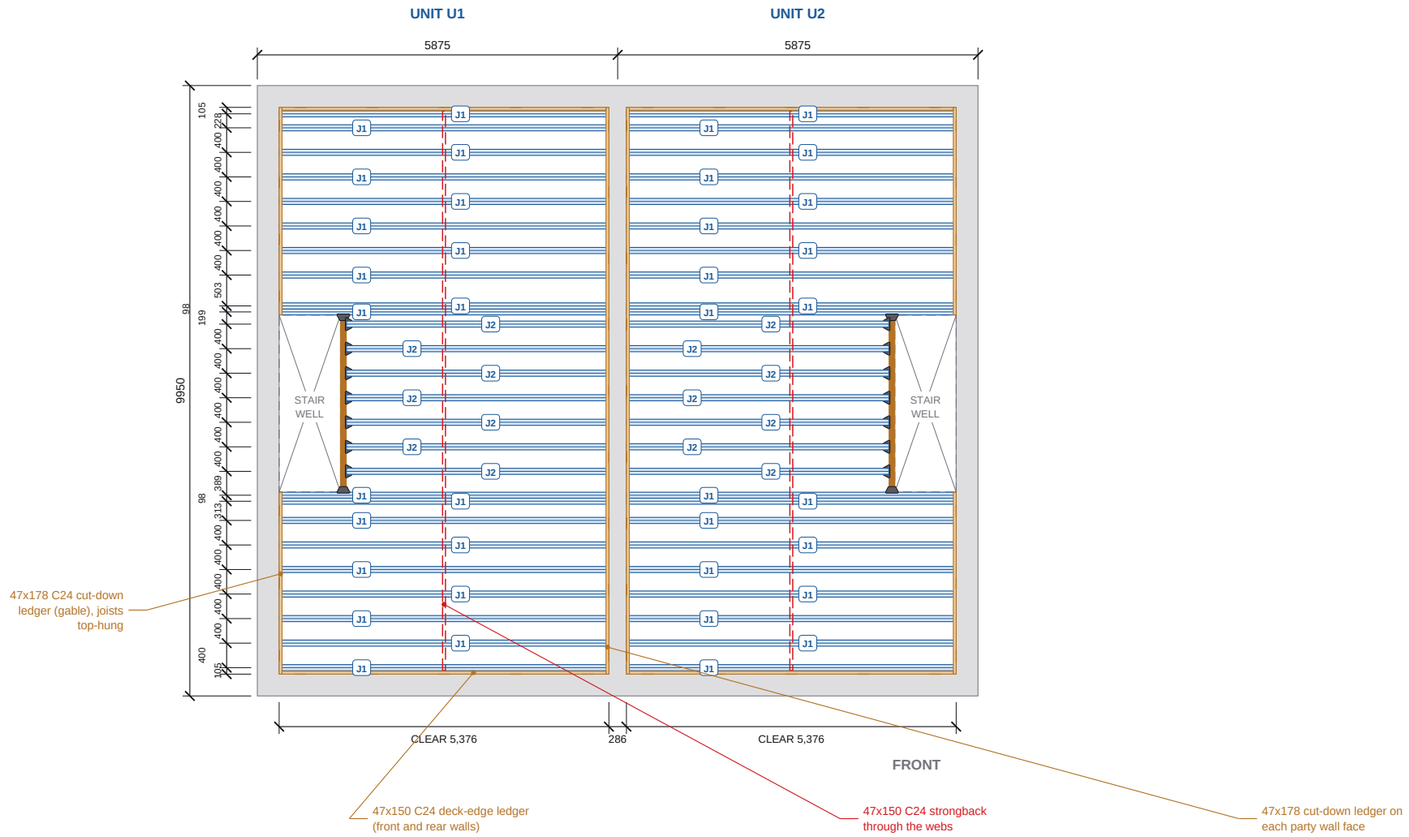

FIRST FLOOR JOIST LAYOUT

Scale 1:100 @ A3 | Plan on the FF joists, deck omitted

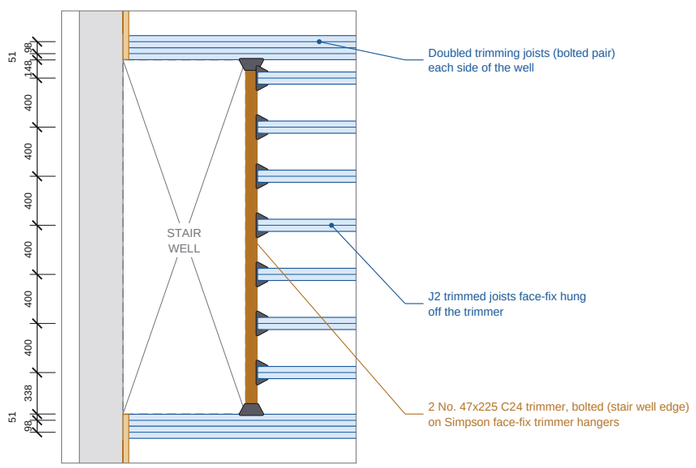



STAIR WELL FRAMING U1 - ENLARGED

Scale 1:50 | other units the same / handed

Do not scale. All dimensions in mm. Check all dimensions on site.

FIRST FLOOR SCHEDULES

JOIST SCHEDULE (253 DEEP, @400)

Type	O/A	Bottom	U1	U2	Total
J1	5,371	5,277	19	19	38
J2	4,277	4,230	7	7	14
	Total		**26**	**26**	**52**

O/A = top flange overall length; Bottom = bottom flange length. Includes 8 No. in doubled trimming pairs. Profiles on ES26-080-FL-02.

LEDGERS, STRONGBACKS, TRIMMERS (C24)

Item	Length	Qty
2 No. 47x225 trimmer, bolted (stair well)	2,886	2
47x150 deck-edge ledger	5,283	4
47x150 strongback	9,125	2
47x178 ledger cut-down ledger	9,239	2
47x178 ledger cut-down ledger	3,382	2
47x178 ledger cut-down ledger	2,964	2

METALWORK AND DECK

Item	Qty
22 Egger Protect P5 T&G board	80
Face-fix joist hanger	14
Face-fix trimmer hanger	4
Strong-Tie ICFVL-CW + ICFLC connector	52
Top-chord restraint clip (galv)	90

NOTES

1. First floor: 253 deep metal-web joists (PS10 / Posi-Joist / Easi-Joist equivalent, 97 x 47 C24 flanges) at 400 c/c spanning GABLE TO PARTY WALL (open-plan ground floor, no internal bearing), TOP-HUNG: the top flange runs over a 47 x 178 C24 ledger (47 x 225 ripped down) and stops 3 short of the ICF face; the bottom flange stops 3 short of the ledger. Galv restraint clip at every bearing.
2. Ledgers fixed to the ICF with cast-in Simpson Strong-Tie ICFVL-CW + ICFLC connectors (spacing to the connector manufacturer's table). Top of ledger +2,631, top of joists +2,678, FF FFL +2,700 above GF FFL.
3. Deck: 22 Egger Protect P5 T&G, glued and screwed to every joist, laid across the joists. 47 x 150 C24 deck-edge ledgers on the front and rear walls.
4. 47 x 150 C24 strongback through the webs at mid-span, fixed to the vertical web plates. Stair well: doubled trimming joists (bolted pair) each side, 2 No. 47 x 225 C24 trimmer bolted, trimmed joists face-fix hung.
5. Joist supplier to design and confirm joist depth, spacing, bracing and ledger fixings; layout for pricing only.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE
T01 SEMI - FIRST FLOOR LAYOUT
Metal-web joists, ledgers, strongbacks, stair well trimming

SCALE	SIZE	DATE
AS SHOWN	A3	19.10.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-FL-01	Q01