

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION


B01
T01 Semi
FFL 201.850




B02
T01 Terrace of 3
FFL 203.175




B03
T01 Terrace of 3
FFL 204.525

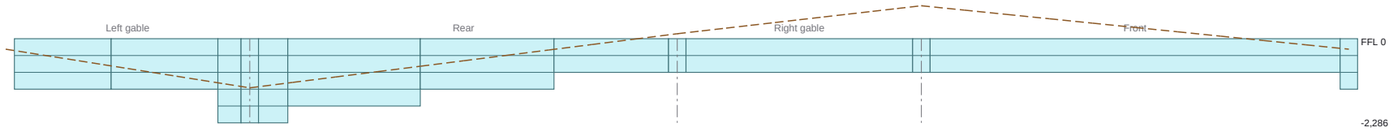


B04
T01 Semi
FFL 206.700




B05
T01 Terrace of 3
FFL 204.450

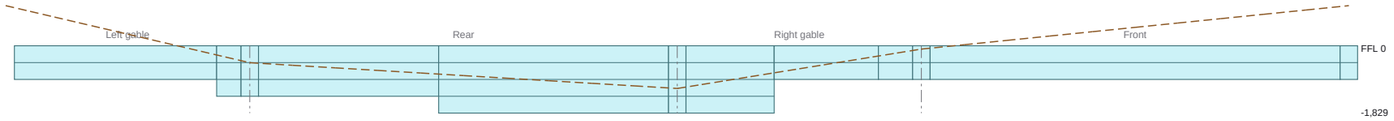


B06
T02 Bungalow
FFL 201.850



B07
T02 Bungalow
FFL 200.025



B08
T01 Terrace of 3
FFL 198.050

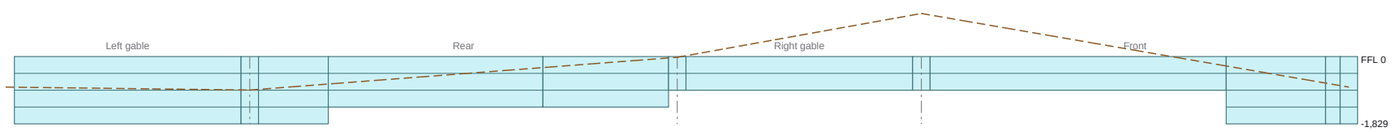

DEVELOPED FOOTING ELEVATIONS

Scale H 1:250 / V 1:167 (x1.5) @ A3 | External envelope unrolled from the front-left corner; FFL = 0 per block

Foundation ICF, course lines at 457.2

Existing ground (survey, bilinear), relative to FFL

STEPPED FOOTING SCHEDULE

PER BLOCK

Block	Type	FFL AOD	Ground FL/FR/RR/RL	Crs	Forms
B01	Semi	201.850	201.46/202.61/201.83/200.86	2-4	78
B02	Terrace of 3	203.175	202.59/203.81/203.13/202.59	2-3	92
B03	Terrace of 3	204.525	204.24/205.42/204.66/203.19	2-5	108
B04	Semi	206.700	206.37/206.39/206.66/206.74	2-3	66
B05	Terrace of 3	204.450	205.54/204.36/203.29/203.99	2-4	117
B06	Bungalow	201.850	202.11/201.09/201.43/202.21	2-3	68
B07	Bungalow	200.025	200.79/199.17/199.17/200.38	2-4	78
B08	Terrace of 3	198.050	197.22/199.22/198.03/197.14	2-4	106

Ground = existing corner levels (m AOD; FL = front left seen from the front). Crs = footing courses below FFL, min-max round the envelope (457.2 each). Forms = Nudura forms in the block's stepped footing model (incl. party walls).

NOTES

1. Foundation ICF stepped per block to follow the existing ground (Tom 19.10: stepped where it can be achieved sensibly). GF FFL per block = mean of the 4 corner existing ground levels + 150 (no proposed FFLs on 10G). The footing is 2 courses (914.4) below FFL on the high side and steps DOWN in whole courses (457.2) where the ground (bilinear between the corners) falls more than 150 below FFL - 150. Level joints are never cut.
2. Developed elevations: the external envelope unrolled clockwise from the front-left corner (seen from above: left gable, rear, right gable, front as the chain runs), horizontal 1:250, vertical x1.5. Party walls (6in Std) step with the envelope at their ends - courses in the table.
3. Underside of the footing ICF = top of the strip foundation (by others, engineer to design). Steps, courses and forms as modelled per block for the quotation take-off. All levels to be confirmed on site against the engineer's foundation design.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE
STEPPED FOUNDATION ICF SCHEDULE

Foundation ICF per block: FFL, steps and developed elevations

SCALE	SIZE	DATE
AS SHOWN	A3	19.10.26
DRAWN: TS	CHECKED	APPROVED

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-FD-01	Q01

Do not scale. All dimensions in mm. Check all dimensions on site.