

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

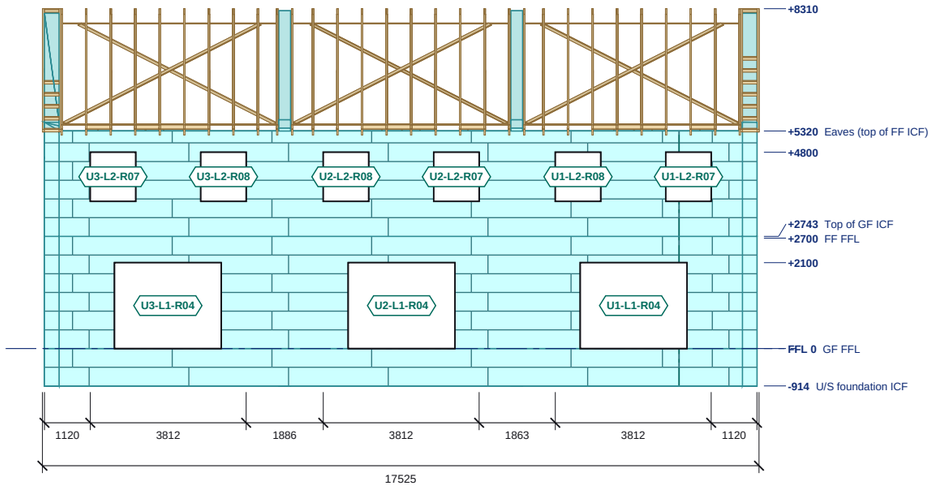

REAR ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

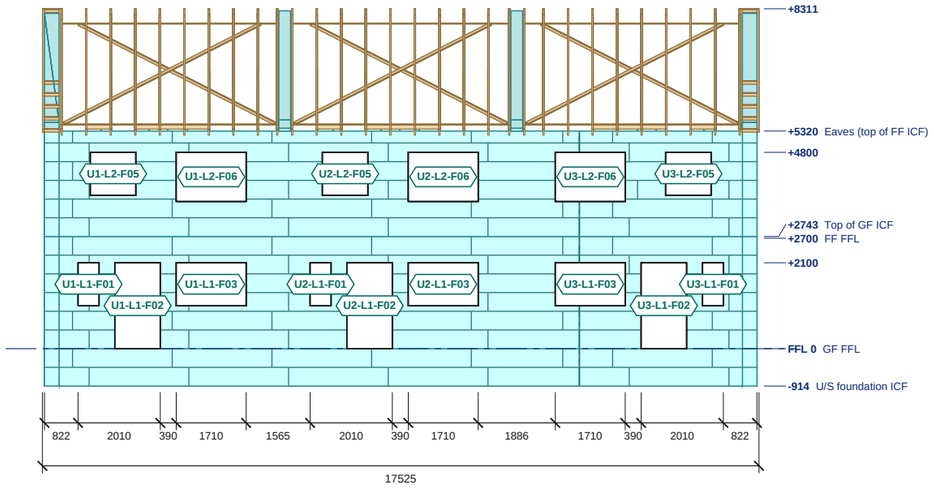

FRONT ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint

0 1 2 3 4 5 6 7 8m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

REAR ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
U1-L1-R04	2610	2100	0	+2100	-
U1-L2-R07	1110	1200	+3600	+4800	-
U1-L2-R08	1110	1200	+3600	+4800	-
U2-L1-R04	2610	2100	0	+2100	-
U2-L2-R07	1110	1200	+3600	+4800	-
U2-L2-R08	1110	1200	+3600	+4800	-
U3-L1-R04	2610	2100	0	+2100	-
U3-L2-R07	1110	1200	+3600	+4800	-
U3-L2-R08	1110	1200	+3600	+4800	-

Structural openings in the ICF; sill and head above GF FFL.

FRONT ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
U1-L1-F01	510	1050	+1050	+2100	-
U1-L1-F02	1110	2100	0	+2100	-
U1-L1-F03	1710	1050	+1050	+2100	-
U1-L2-F05	1110	1050	+3750	+4800	-
U1-L2-F06	1710	1200	+3600	+4800	-
U2-L1-F01	510	1050	+1050	+2100	-
U2-L1-F02	1110	2100	0	+2100	-
U2-L1-F03	1710	1050	+1050	+2100	-
U2-L2-F05	1110	1050	+3750	+4800	-
U2-L2-F06	1710	1200	+3600	+4800	-
U3-L1-F01	510	1050	+1050	+2100	-
U3-L1-F02	1110	2100	0	+2100	-
U3-L1-F03	1710	1050	+1050	+2100	-
U3-L2-F05	1110	1050	+3750	+4800	-
U3-L2-F06	1710	1200	+3600	+4800	-

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2100
FF FFL	+2700
Top of GF ICF	+2743
top of ICF	+4800
Eaves (top of FF ICF)	+5320
top of roof build-up	+8310
top of roof build-up	+8311

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-080-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE

T01 TERRACE OF 3 - FRONT AND REAR ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-EL-03	Q01