**PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.**

**QUOTATION - NOT FOR CONSTRUCTION**

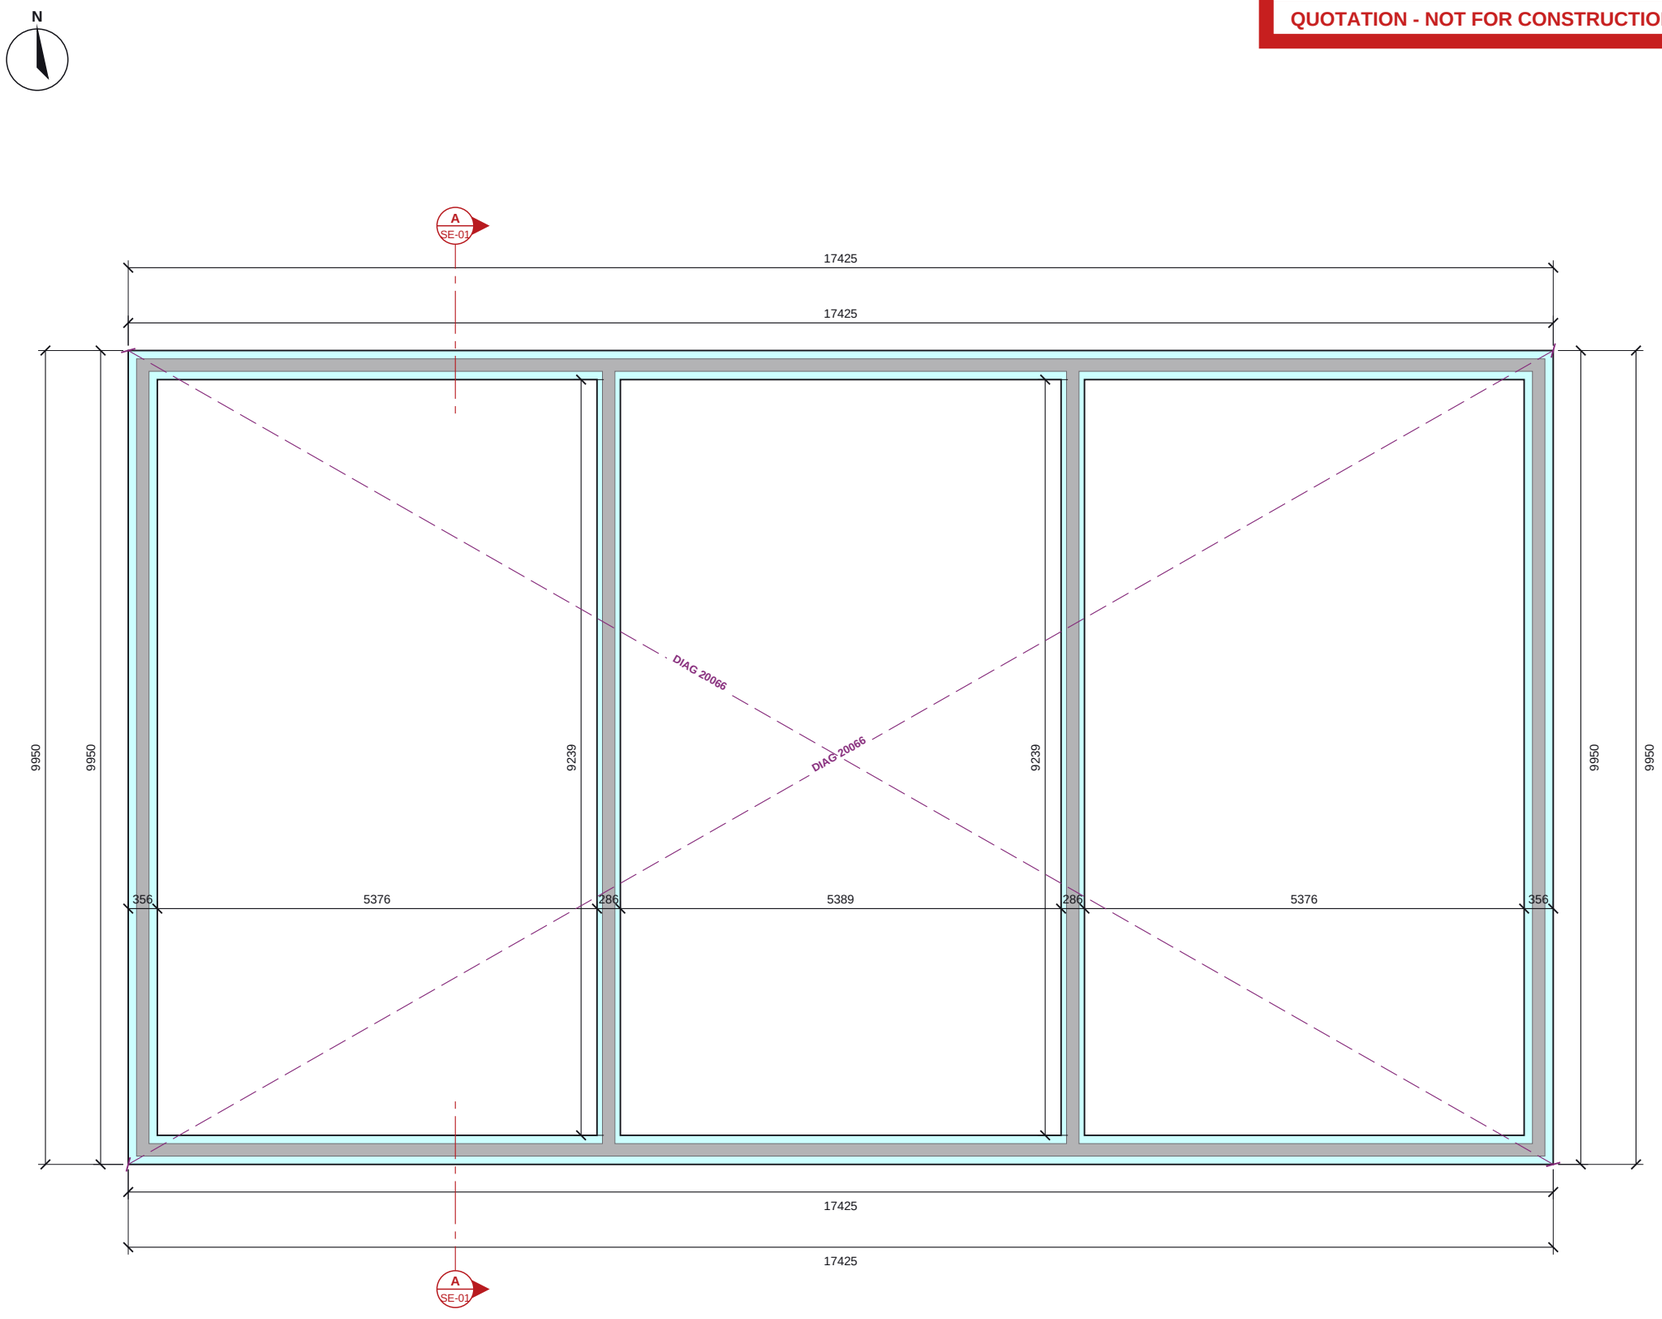


EPS insulation (Nudura form)
Concrete core
End cap at opening
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

## FOOTING ICF PLAN

Scale 1:75 @ A3 | Plan cut at -457

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

## FOOTING ICF SCHEDULES

### OPENING SCHEDULE

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| none | | | | | |

Structural openings in the ICF; sill and head above GF FFL.

### NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard party walls. Foundation ICF stepped per block on the course grid to follow the existing ground (FFL per block = mean corner ground + 150; no proposed FFLs on 10G) - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| Q01 | 19.10.26 | First issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| Wannop Developments Ltd | Land to Rear of 1-8 Wesley Terrace, Castleside |

DRAWING TITLE

**T01 TERRACE OF 3 - FOUNDATION ICF**

ICF walls, openings, lintels, steel over and engineer's notes

| SCALE | SIZE | DATE |
|---|---|---|
| 1:75 | A3 | 19.10.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-080-GA-04 | Q01 |