BILL OF QUANTITIES

ICF KIT · CONCRETE · LABOUR

LAND TO REAR OF 1-8 WESLEY TERRACE, CASTLESIDE

18-Plot ICF Development · 8 blocks · Castleside, Consett, County Durham DH8 9QB

Quotation Reference	ES26-080
Project	Land to Rear of 1-8 Wesley Terrace, Castleside
House Type	HT01 3B5P (semi pairs + terraces of 3) / HT02 2B4P bungalow
Client	Wannop Developments Ltd
Site Address	Land to Rear of 1-8 Wesley Terrace, Castleside, Consett DH8 9QB
BOQ Issued	19 October 2026
BOQ Reference	BOQ-ES26-080-001 · Revision 1.0
Prepared by	Tom Smith — BuildEase Manager, Nudura UK
Issued by	Tremco Construction Products Group
Currency	Pound Sterling (GBP) · VAT at 20%
Measurement Convention	RICS New Rules of Measurement (NRM2)

IMPORTANT NOTICE — DISCLAIMER

- This Bill of Quantities is supplied in good faith based on the BuildEase take-off models for Land to Rear of 1-8 Wesley Terrace, Castleside and the associated Tremco CPG quotation.
- ALL QUANTITIES SHOULD BE INDEPENDENTLY CHECKED AND VERIFIED BY THE PROJECT QS / QUANTITY SURVEYOR before tender submission, ordering or contract award.
- This BOQ does NOT include an external render / finish allowance. Any render, coatings or external wall finish must be measured and priced separately.
- Section C (Concrete) volumes are geometric voids — allow ~3% web displacement deduction and ~5% wastage on top when ordering ready-mix.
- Section D (Labour) day estimates are scaled proportionately from a reference project; actual gang productivity will vary with site conditions, weather and trade experience.
- BuildEase, Tremco Construction Products Group and Nudura UK accept no liability for tender or contract outcomes arising from the use of these figures. If in doubt — ask.
- Contact: Tom Smith — BuildEase Manager, Nudura UK — for clarification on any quantity or rate basis in this document.


CONTENTS

Section	Description	Sheet	Status	
	Cover & Project Information	**Cover**		
	Contents	**Contents**		
	Indicative Programme (Gantt)	**Programme**	*Information*	
	Summary of Tender Pricing	**Summary**		
A	Preliminaries	**A_Preliminaries**	*Contractor priced*	
B	ICF Kit Supply	**B_ICF_Supply**	*Pre-priced*	
C	Concrete Supply, Pump & Placement	**C_Concrete**	*Contractor priced*	
D	Labour — ICF, Floors & Roofs	**D_Labour**	*Contractor priced*	
F	Reference Data (informative only)	**F_Reference**	—	

PROG · INDICATIVE INSTALL PROGRAMME — RESOURCE-LEVELLED, ONE COLUMN PER WORKING DAY

Group-by-group sequential build with a staggered start between groups. ICF install + snag + pour cycles, intermediate floors and roof structure are completed before moving on. Resourcing and durations below are indicative and must be validated by site management. Render / external finish is NOT included in this programme.

Group	Plots	Forms	Weeks	Start wk
Block B01 - HT01 semi	2	389	4	1
Block B02 - HT01	3	508	5	1
Block B03 - HT01	3	521	6	1
Block B04 - HT01 semi	2	380	5	2
Block B05 - HT01	3	526	5	3
Block B06 - HT02	1	122	4	4
Block B07 - HT02	1	129	3	5
Block B08 - HT01	3	518	6	5

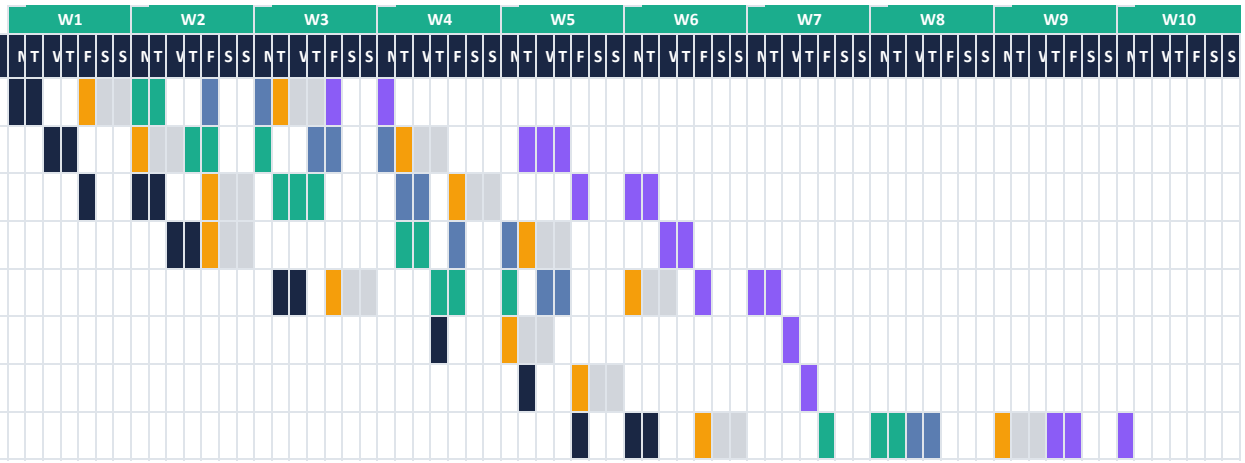

LEGEND

	ICF walls — FB + L1 lifts installed together (erection, snag & pour)
	ICF walls — each lift above the first, once the floor below it is in
	Concrete pour — 1 day per lift, ICF crew attends, pump on site
	Curing — pours held to Fridays where possible so the 2 curing days fall on the
	Floor structure — one per intermediate floor (FF, SF…), between wall lifts
	Roof structure (all-timber, trusses + rafters)

RESOURCING

- 1 ICF crews of 8 trained installers (each crew = 2 four-man gang-equivalents) erect the wall lifts, moving to the next ready block while a floor is fitted; 1 joinery crew of 3 fits every intermediate floor and roof (Joinery at 1 day per plot for each floor and 1 day per plot for each roof (Tom 19.10.26)). Programme is resource-levelled day by day (white = block waiting for a crew)
- Total ICF site programme: 10 working weeks (ICF erection, floors and roofs). Section A Preliminaries are quantified against this 10-week programme.
- EXTERNAL RENDER / FINISH IS EXCLUDED from this BOQ and this programme. Where a render system is later specified, allow a separate workstream — per BBA guidance, render cannot begin until the concrete core has cured for a minimum of 28 days after the final pour.
- Concrete pump booked on the pour days for each group (see Section C).
- Lead time for BuildEase Pre-Cut Service: 5–6 weeks from order placement; procurement runs in parallel with mobilisation.
- Programme estimates are provided in good faith and must be verified by the project / site management team.

SUMMARY OF TENDER PRICING

Section totals are carried forward from each Bill section. Pre-priced columns show values from the associated Tremco CPG quotation; contractor-priced columns populate automatically when rates are entered in the section sheets. This BOQ excludes external render.

Section	Description	Pre-priced (£)	Contractor-priced (£)	Section Total (£)	
A	Preliminaries		£0.00	**£0.00**	
B	ICF Kit Supply	£196,202.12		**£196,202.12**	
C	Concrete Supply, Pump & Placement		£0.00	**£0.00**	
D	Labour — ICF, Floors & Roofs		£0.00	**£0.00**	
	NET TOTAL (excluding VAT)	**£196,202.12**	**£0.00**	**£196,202.12**	
	VAT @ 20%			£39,240.42	
	GRAND TOTAL (inclusive of VAT)			**£235,442.54**	

SIGNATURES

Priced by					
Tendered by					
Approved by					

A · PRELIMINARIES

Items priced per working week against the site programme total of 10 weeks (see Programme sheet). Quantities are pre-populated; the contractor inserts the weekly rate.

Ref	Description	Unit	Qty	Rate (£)	Total (£)
A.1	Site set-up, fencing, signage, induction & welfare establishment	item	1		£0.00
A.2	Welfare facilities — canteen, drying, toilets (hire)	wk	10		£0.00
A.3	Contract management & site supervision	wk	10		£0.00
A.4	Health & Safety, RAMS, CDM consultancy	wk	10		£0.00
A.5	Public liability and contract works insurance	item	1		£0.00
A.6	Scaffolding — independent access for ICF erection	wk	10		£0.00
A.7	Plant hire — telehandler / forklift for offload & ICF moves	wk	10		£0.00
A.8	Plant hire — small tools, generators, power & lighting	wk	10		£0.00
A.9	Hoarding / site enclosure / security	wk	10		£0.00
A.10	Temporary services — water, power, lighting (hire)	wk	10		£0.00
A.11	Site clean, waste management & skip rotation	wk	10		£0.00
A.12	Setting out and surveying — engineer's level checks	wk	10		£0.00
A.13	Site take-down, hand-over & demobilisation	item	1		£0.00
A.14	Pre-completion sound test (Approved Document E)	test			£0.00
A.15	Air-tightness test (Approved Document L)	test			£0.00
A.16	Day works allowance	sum			£0.00
	A — PRELIMINARIES SUBTOTAL				**£0.00**

£0.00

B · ICF KIT SUPPLY

ICF material supply values are pre-priced from the associated Tremco CPG quotation. Pre-cut service fees are taken from each BuildEase take-off.

Ref	Description	Unit	Qty	Rate (£)	Total (£)
B.1 — ICF Block, Forms & Accessories					
B.1	ICF Materials — Block B01 - HT01 semi pair - plots 01, 02 (2 plot(s), 389 forms)	group	1	£21,961.23	£21,961.23
B.1	ICF Materials — Block B02 - HT01 terrace of 3 - plots 03, 04, 05 (3 plot(s), 508 forms)	group	1	£28,974.06	£28,974.06
B.1	ICF Materials — Block B03 - HT01 terrace of 3 - plots 06, 07, 08 (3 plot(s), 521 forms)	group	1	£29,603.35	£29,603.35
B.1	ICF Materials — Block B04 - HT01 semi pair - plots 09, 10 (2 plot(s), 380 forms)	group	1	£21,476.07	£21,476.07
B.1	ICF Materials — Block B05 - HT01 terrace of 3 - plots 11, 12, 13 (3 plot(s), 526 forms)	group	1	£29,949.87	£29,949.87
B.1	ICF Materials — Block B06 - HT02 bungalow - plots 14 (1 plot(s), 122 forms)	group	1	£6,975.24	£6,975.24
B.1	ICF Materials — Block B07 - HT02 bungalow - plots 15 (1 plot(s), 129 forms)	group	1	£7,309.70	£7,309.70
B.1	ICF Materials — Block B08 - HT01 terrace of 3 - plots 16, 17, 18 (3 plot(s), 518 forms)	group	1	£29,495.39	£29,495.39
B.2 — BuildEase Pre-Cut Service Fee					
B.2	Pre-Cut Service — Block B01 - HT01 semi pair - plots 01, 02	group	1	£1,689.77	£1,689.77
B.2	Pre-Cut Service — Block B02 - HT01 terrace of 3 - plots 03, 04, 05	group	1	£2,017.35	£2,017.35
B.2	Pre-Cut Service — Block B03 - HT01 terrace of 3 - plots 06, 07, 08	group	1	£1,322.49	£1,322.49
B.2	Pre-Cut Service — Block B04 - HT01 semi pair - plots 09, 10	group	1	£1,029.50	£1,029.50
B.2	Pre-Cut Service — Block B05 - HT01 terrace of 3 - plots 11, 12, 13	group	1	£1,331.98	£1,331.98
B.2	Pre-Cut Service — Block B06 - HT02 bungalow - plots 14	group	1	£1,116.94	£1,116.94
B.2	Pre-Cut Service — Block B07 - HT02 bungalow - plots 15	group	1	£657.56	£657.56
B.2	Pre-Cut Service — Block B08 - HT01 terrace of 3 - plots 16, 17, 18	group	1	£1,290.28	£1,290.28
B.3 — Haulage					
B.3	Haulage to site — project-wide estimate (TBC on delivery schedule)	item	1	£9,041.34	£9,041.34
B.4 — Alignment System					
B.4	Alignment System Rental — Block B01 - HT01 semi pair - plots 01, 02 (37 systems)	group	1	£96.00	£96.00
B.4	Alignment System Rental — Block B02 - HT01 terrace of 3 - plots 03, 04, 05 (50 systems)	group	1	£144.00	£144.00
B.4	Alignment System Rental — Block B03 - HT01 terrace of 3 - plots 06, 07, 08 (50 systems)	group	1	£144.00	£144.00
B.4	Alignment System Rental — Block B04 - HT01 semi pair - plots 09, 10 (37 systems)	group	1	£96.00	£96.00
B.4	Alignment System Rental — Block B05 - HT01 terrace of 3 - plots 11, 12, 13 (50 systems)	group	1	£144.00	£144.00
B.4	Alignment System Rental — Block B06 - HT02 bungalow - plots 14 (28 systems)	group	1	£96.00	£96.00
B.4	Alignment System Rental — Block B07 - HT02 bungalow - plots 15 (28 systems)	group	1	£96.00	£96.00
B.4	Alignment System Rental — Block B08 - HT01 terrace of 3 - plots 16, 17, 18 (50 systems)	group	1	£144.00	£144.00
	B — ICF KIT SUPPLY SUBTOTAL				**£196,202.12**

£196,202.12

C · CONCRETE SUPPLY, PUMP & PLACEMENT

Volumes are geometric void calculations (block length × course height × core thickness). Allow ~3% for plastic web displacement and ~5% wastage when ordering. Rates to be inserted by the contractor.

Ref	Description	Unit	Qty	Rate (£)	Total (£)
C.1 — Ready-Mix Concrete Supply (C28/35 typical to BS 8500)					
C.1	Ready-mix concrete — Block B01 - HT01 semi pair - plots 01, 02 (2 plot(s), geometric void)	m³	62.77		£0.00
C.1	Ready-mix concrete — Block B02 - HT01 terrace of 3 - plots 03, 04, 05 (3 plot(s), geometric void)	m³	83.05		£0.00
C.1	Ready-mix concrete — Block B03 - HT01 terrace of 3 - plots 06, 07, 08 (3 plot(s), geometric void)	m³	85.14		£0.00
C.1	Ready-mix concrete — Block B04 - HT01 semi pair - plots 09, 10 (2 plot(s), geometric void)	m³	61.24		£0.00
C.1	Ready-mix concrete — Block B05 - HT01 terrace of 3 - plots 11, 12, 13 (3 plot(s), geometric void)	m³	85.99		£0.00
C.1	Ready-mix concrete — Block B06 - HT02 bungalow - plots 14 (1 plot(s), geometric void)	m³	18.92		£0.00
C.1	Ready-mix concrete — Block B07 - HT02 bungalow - plots 15 (1 plot(s), geometric void)	m³	20.00		£0.00
C.1	Ready-mix concrete — Block B08 - HT01 terrace of 3 - plots 16, 17, 18 (3 plot(s), geometric void)	m³	84.63		£0.00
C.2 — Concrete Pump Hire					
C.2	Boom pump hire — Block B01 - HT01 semi pair - plots 01, 02	day	2		£0.00
C.2	Boom pump hire — Block B02 - HT01 terrace of 3 - plots 03, 04, 05	day	2		£0.00
C.2	Boom pump hire — Block B03 - HT01 terrace of 3 - plots 06, 07, 08	day	2		£0.00
C.2	Boom pump hire — Block B04 - HT01 semi pair - plots 09, 10	day	2		£0.00
C.2	Boom pump hire — Block B05 - HT01 terrace of 3 - plots 11, 12, 13	day	2		£0.00
C.2	Boom pump hire — Block B06 - HT02 bungalow - plots 14	day	2		£0.00
C.2	Boom pump hire — Block B07 - HT02 bungalow - plots 15	day	2		£0.00
C.2	Boom pump hire — Block B08 - HT01 terrace of 3 - plots 16, 17, 18	day	2		£0.00
C.2	Pump mobilisation / demobilisation	item	1		£0.00
C.3 — Concrete Vibration & Placement Plant					
C.3	Internal poker vibrator hire — site duration	wk	10		£0.00
C.3	Concrete banksman / poker operator	day			£0.00
	C — CONCRETE SUBTOTAL				**£0.00**

£0.00

D · LABOUR — ICF INSTALL, FLOORS & ROOFS

ICF install days scaled proportionately against the Maycroft reference (52.65 forms per gang-day). Rates below are per 4-man gang per day. Floor and roof allowances are taken per group from the project configuration.

Ref	Description	Unit	Qty	Rate (£)	Total (£)
D.1 — ICF Install Gang					
D.1	ICF install — Block B01 - HT01 semi pair - plots 01, 02 (389 forms ÷ 52.65 forms/day = 7.4 gang-days)	gang-day	7.40		£0.00
D.1	ICF install — Block B02 - HT01 terrace of 3 - plots 03, 04, 05 (508 forms ÷ 52.65 forms/day = 9.6 gang-days)	gang-day	9.60		£0.00
D.1	ICF install — Block B03 - HT01 terrace of 3 - plots 06, 07, 08 (521 forms ÷ 52.65 forms/day = 9.9 gang-days)	gang-day	9.90		£0.00
D.1	ICF install — Block B04 - HT01 semi pair - plots 09, 10 (380 forms ÷ 52.65 forms/day = 7.2 gang-days)	gang-day	7.20		£0.00
D.1	ICF install — Block B05 - HT01 terrace of 3 - plots 11, 12, 13 (526 forms ÷ 52.65 forms/day = 10.0 gang-days)	gang-day	10.00		£0.00
D.1	ICF install — Block B06 - HT02 bungalow - plots 14 (122 forms ÷ 52.65 forms/day = 2.3 gang-days)	gang-day	2.30		£0.00
D.1	ICF install — Block B07 - HT02 bungalow - plots 15 (129 forms ÷ 52.65 forms/day = 2.5 gang-days)	gang-day	2.50		£0.00
D.1	ICF install — Block B08 - HT01 terrace of 3 - plots 16, 17, 18 (518 forms ÷ 52.65 forms/day = 9.8 gang-days)	gang-day	9.80		£0.00
D.1	Snag, pour & cure attendance (30% allowance, project total)	gang-day	17.60		£0.00
D.2 — Floor Structure Labour (metal-web joists, top-hung balloon frame)					
D.2	Floor structure — Block B01 - HT01 semi pair - plots 01, 02 (1 floor × 2 gang-days)	gang-day	2		£0.00
D.2	Floor structure — Block B02 - HT01 terrace of 3 - plots 03, 04, 05 (1 floor × 3 gang-days)	gang-day	3		£0.00
D.2	Floor structure — Block B03 - HT01 terrace of 3 - plots 06, 07, 08 (1 floor × 3 gang-days)	gang-day	3		£0.00
D.2	Floor structure — Block B04 - HT01 semi pair - plots 09, 10 (1 floor × 2 gang-days)	gang-day	2		£0.00
D.2	Floor structure — Block B05 - HT01 terrace of 3 - plots 11, 12, 13 (1 floor × 3 gang-days)	gang-day	3		£0.00
D.2	Floor structure — Block B08 - HT01 terrace of 3 - plots 16, 17, 18 (1 floor × 3 gang-days)	gang-day	3		£0.00
D.3 — Roof Structure Labour (trusses + rafters, all-timber)					
D.3	Roof structure — Block B01 - HT01 semi pair - plots 01, 02	gang-day	2		£0.00
D.3	Roof structure — Block B02 - HT01 terrace of 3 - plots 03, 04, 05	gang-day	3		£0.00
D.3	Roof structure — Block B03 - HT01 terrace of 3 - plots 06, 07, 08	gang-day	3		£0.00
D.3	Roof structure — Block B04 - HT01 semi pair - plots 09, 10	gang-day	2		£0.00
D.3	Roof structure — Block B05 - HT01 terrace of 3 - plots 11, 12, 13	gang-day	3		£0.00
D.3	Roof structure — Block B06 - HT02 bungalow - plots 14	gang-day	1		£0.00
D.3	Roof structure — Block B07 - HT02 bungalow - plots 15	gang-day	1		£0.00
D.3	Roof structure — Block B08 - HT01 terrace of 3 - plots 16, 17, 18	gang-day	3		£0.00
	D — LABOUR SUBTOTAL				**£0.00**

£0.00

F · REFERENCE DATA (informative only)

Per-group quantities calculated from the BuildEase take-off models. Values feed into Sections C and D. Render is excluded from this BOQ.

Group	Plots	Forms	Concrete (m³)	ICF install days	Floor + Roof days	Pre-cut (£)
Block B01 - HT01 semi pair - plots 01, 02	2	389	62.77	7.40	4	£1,689.77
Block B02 - HT01 terrace of 3 - plots 03, 04, 05	3	508	83.05	9.60	6	£2,017.35
Block B03 - HT01 terrace of 3 - plots 06, 07, 08	3	521	85.14	9.90	6	£1,322.49
Block B04 - HT01 semi pair - plots 09, 10	2	380	61.24	7.20	4	£1,029.50
Block B05 - HT01 terrace of 3 - plots 11, 12, 13	3	526	85.99	10.00	6	£1,331.98
Block B06 - HT02 bungalow - plots 14	1	122	18.92	2.30	1	£1,116.94
Block B07 - HT02 bungalow - plots 15	1	129	20.00	2.50	1	£657.56

Block B08 - HT01 terrace of 3 - plots 16, 17, 18	3	518	84.63	9.80	6	£1,290.28
SITE	**18**	**3,093**	**501.75**	**58.70**	**34**	**£10,455.87**

PER-LIFT FORM BREAKDOWN

Group	Lift	4" Std	6" XR35 str	6" XR35 cnr	10" Std	Lift total
Block B01 - HT01 semi pair - plots 01, 02	FB	0	57	11	0	68
Block B01 - HT01 semi pair - plots 01, 02	L1	0	109	24	0	133
Block B01 - HT01 semi pair - plots 01, 02	L2	0	164	24	0	188
Block B02 - HT01 terrace of 3 - plots 03, 04, 05	FB	0	70	10	0	80
Block B02 - HT01 terrace of 3 - plots 03, 04, 05	L1	0	154	24	0	178
Block B02 - HT01 terrace of 3 - plots 03, 04, 05	L2	0	226	24	0	250
Block B03 - HT01 terrace of 3 - plots 06, 07, 08	FB	0	81	12	0	93

Block B03 - HT01 terrace of 3 - plots 06, 07, 08	L1	0	154	24	0	178
Block B03 - HT01 terrace of 3 - plots 06, 07, 08	L2	0	226	24	0	250
Block B04 - HT01 semi pair - plots 09, 10	FB	0	48	11	0	59
Block B04 - HT01 semi pair - plots 09, 10	L1	0	109	24	0	133
Block B04 - HT01 semi pair - plots 09, 10	L2	0	164	24	0	188
Block B05 - HT01 terrace of 3 - plots 11, 12, 13	FB	0	86	12	0	98
Block B05 - HT01 terrace of 3 - plots 11, 12, 13	L1	0	154	24	0	178
Block B05 - HT01 terrace of 3 - plots 11, 12, 13	L2	0	226	24	0	250
Block B06 - HT02 bungalow - plots 14	FB	0	37	12	0	49
Block B06 - HT02 bungalow - plots 14	L1	0	53	20	0	73

Block B07 - HT02 bungalow - plots 15	FB	0	42	14	0	56
Block B07 - HT02 bungalow - plots 15	L1	0	53	20	0	73
Block B08 - HT01 terrace of 3 - plots 16, 17, 18	FB	0	78	12	0	90
Block B08 - HT01 terrace of 3 - plots 16, 17, 18	L1	0	154	24	0	178
Block B08 - HT01 terrace of 3 - plots 16, 17, 18	L2	0	226	24	0	250

GEOMETRIC CONSTANTS & CALCULATION BASIS		
Block length	2.438 m	*96 inches*
Course height	0.4574 m	*18 inches*
4" Std straight volume	0.1133 m³	*#NAME?*
6" XR35 straight volume	0.1699 m³	*#NAME?*
10" Std straight volume	0.2832 m³	*#NAME?*
4" Std corner volume	0.0511 m³	*L-void; long 31.625" / short 15.625"*
6" XR35 corner volume	0.1133 m³	*L-void; long 43" / short 27"*
Maycroft install rate	52.65 forms/day	*Reference: 1053 forms ÷ 20 days*

Bill of Quantities Package - Finishes & Ancillary Trades

ES26-080 | Land to Rear of 1-8 Wesley Terrace, Castleside | Wannop Developments Ltd

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Project	Land to Rear of 1-8 Wesley Terrace, Castleside
Site	Land to Rear of 1-8 Wesley Terrace, Castleside, County Durham DH8 9QB
Client	Wannop Developments Ltd
Architect	Code L6 Architecture Ltd (24-014, drawings SK11A / 10G, DRAFT)
Quotation ref	ES26-080
Document	Bill of Quantities Package - Finishes & Ancillary Trades
Issue	01 (19/10/2026)
Scope	18 dwellings in 8 blocks: HT01 3-bed 2-storey houses as 2 semi pairs (B01, B04) and 4 terraces of 3 (B02, B03, B05 brick; B08 stone, plots 16-18); HT02 2-bed detached bungalows (B06, B07, plots 14-15)
Prepared by	BuildEase (Tremco CPG UK) - BuildEase Design Suite quotation models
Status	**FOR INFORMATION, COORDINATION AND PRICING BY OTHERS - rates blank; NOT part of the Nudura ICF price**

PACKAGE OVERVIEW - pricing by others (all amounts formula-linked to each bill's Package Summary)

Bill	Package	Code / NRM2	Supply £	Install £	Total £
Bill 1	External Wall Finishes - Brick & Stone Slips	CLD NRM2 21	£0.00	£0.00	£0.00
Bill 2	Internal Linings - Plasterboard, Tape, Beads & Skim	DRY NRM2 28	£0.00	£0.00	£0.00
Bill 3	Internal Doors & Ironmongery	JOI NRM2 24	£0.00	£0.00	£0.00
Bill 4	Joinery - Skirtings, Architraves, Window Boards & Loft Hatches	JOI NRM2 22	£0.00	£0.00	£0.00
Bill 5	Timber Stud Partitions - Framing, Openings, Pattresses & Fixings	JOI NRM2 16	£0.00	£0.00	£0.00
	GRAND TOTAL - finishes / ancillary trades, net (excl. VAT)		**£0.00**	**£0.00**	**£0.00**

Optional additions (enter %; blank = 0)		%	Amount £
Preliminaries	on the finishes net grand total		£0.00
Overheads & profit	on net total + preliminaries		£0.00
Contingency	on net total + preliminaries + OH&P		£0.00
	GRAND TOTAL finishes incl. preliminaries, OH&P and contingency (excl. VAT)		**£0.00**

ICF PACKAGE HOOK - BuildEase BOQ Builder (ICF kit, concrete, labour, preliminaries, programme)

Nudura ICF package (BuildEase BOQ Builder)	**£196,202.12**
COMBINED TOTAL - finishes package (incl. additions) + ICF package, excl. VAT	**£196,202.12**

Pale-yellow cells are the only inputs (rates on each bill sheet, percentages and the ICF hook here). Everything else is a locked formula (protection has no password). Schedules A to D are reference only and are not priced. Named cells: FINISHES_NET_TOTAL, FINISHES_GRAND_TOTAL, ICF_PACKAGE_TOTAL, COMBINED_TOTAL.

IMPORTANT - This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

KEY QUANTITIES (site totals, 8 blocks / 18 plots, net; linked to the bills)

Brick slips, walls (net, excl. reveals)	**1,460.57**	m2
Stone slips, walls (net, excl. reveals)	**280.61**	m2
Plasterboard, walls, reveals and bands (net)	**4,407.15**	m2
Plasterboard, ceilings and stair soffits (net)	**1,706.72**	m2
Skim coat	**6,113.88**	m2
Internal doorsets	**140.00**	nr
Skirting	**1,508.20**	m
Architrave	**1,715.70**	m
Window boards	**104.00**	nr
Timber stud partitions (gross area)	**1,284.47**	m2
Partition timber 38 x 89 C16 (estimate)	**5,680.31**	m
Door openings formed in partitions	**140.00**	nr

Document control

Issue	Description	Date	By / Status

01	First issue: finishes / ancillary-trades BOQ package from the quotation models (port of the ES26-081 package). Live pricing workbook: supply and install rates, package summaries and cover overview by formula; rates blank for pricing by others; ICF_PACKAGE_TOTAL hook for merging with the BOQ Builder	19/10/2026	BuildEase - T. Smith / For information / pricing by others

Contents

Finishes Cover (this sheet) - overview
General Notes
Summary of Bills (section breakdown)
Finishes Bill 1 External Finish
Finishes Bill 2 Internal Lining
Finishes Bill 3 Doors
Finishes Bill 4 Joinery
Finishes Bill 5 Partitions
Schedule A Floor Areas (not priced)
Schedule B Openings (not priced)
Schedule C Per Plot (not priced)
Schedule D Sloping Plots (not priced)

Supplied in good faith for guidance only. NOT part of the Nudura ICF price. Check and verify with the appropriate professional before use. No waste unless stated.

General Notes, Measurement Basis, Assumptions & Exclusions

ES26-080 | Land to Rear of 1-8 Wesley Terrace, Castleside | Wannop Developments Ltd

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

1 Purpose and status

1.1 This package presents the finishes and ancillary-trade quantities measured by BuildEase alongside the Nudura ICF quotation for Land to Rear of 1-8 Wesley Terrace, Castleside (ref ES26-080). It is set out in the form of a Bill of Quantities so that the client, their quantity surveyor and trade contractors can price and coordinate the works.

1.2 Status: FOR INFORMATION, COORDINATION AND PRICING BY OTHERS. Supply and install rates are left blank deliberately - BuildEase / Tremco CPG are not pricing these trades. The Excel workbook is a live pricing document: enter rates and every amount, section subtotal, package total and the cover overview update by formula.

1.3 The ICF kit, concrete core, pumping and ICF / floor / roof labour and the build programme are in the separate BuildEase BOQ Builder workbook. The cover of this workbook carries a named hook (ICF_PACKAGE_TOTAL) so the two can be combined into one workbook and one grand total.

1.4 **This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price.**

1.5 **Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.**

2 Basis of measurement

2.1 Measured generally in accordance with the principles of NRM2 (RICS New Rules of Measurement, Detailed measurement for building works): work measured net as fixed in position, items grouped by work section, units m / m2 / nr / item. NRM2 is referenced for structure only; descriptions are BuildEase's own.

2.2 Quantities are NET. No allowance for waste, laps, cutting or breakage is included unless stated. Where useful an "Order guide" with a stated waste % is given in the Notes column; it is guidance only.

2.3 Quantity columns: one column PER BLOCK for each block type - T01_SEMI (B01, B04; plots 01-02, 09-10), T01_TER3 brick (B02, B03, B05; plots 03-08, 11-13), T01_TER3 stone (B08; plots 16-18) and T02_BUNG (B06, B07; plots 14, 15). The Site total = sum of (per-block quantity x number of blocks) and is a live formula. Mid-terrace units differ slightly from end units (party walls both sides); Schedule C lists the key quantities plot by plot.

2.4 Sources: Code L6 drawings 24-014-SK11A (house types, plans and elevations, 1:100 @ A1, DRAFT) and 24-014-10G (site plan, DRAFT); the BuildEase quotation models per block type (03_Models WD_T01_SEMI / WD_T01_TER3 / WD_T02_BUNG) through their specs (04_Logs/specs WD_spec*.json, WD_partitions.json) and build reports (04_Logs/build: floor / stair, TLSTF partition, pattress and noggin reports). Measured offline by 05_Scripts/wd_xi_takeoff.py; presented by wd_boq.py.

3 Assumptions

3.1 Walls: external ICF 6in XR35 (355.6 mm) set out on the drawn outer face; party walls 6in Std (285.75 mm). External finish: brick to units 01-15 (incl. bungalows 14-15) and stone to units 16-18 (SK11A elevations), taken as slip systems on the ICF - the ICF occupies the drawn wall thickness, so a full masonry outer leaf would need the set-out changed (confirm with the architect).

3.2 Windows / doors set 1/3 back from the outer ICF face (118.5 mm). External reveal = set-back + slip (brick 25 mm / stone 30 mm). Internal reveal = 195 mm (ICF less set-back less frame 70 plus lining 27.5).

3.3 Finish heights: from DPC (FFL - 150) to eaves 5,320 (HT01) / 2,320 (HT02); HT01 gables to the drawn brick apex 8,255. Lining heights: HT01 GF 2,425 (u/s joists), FF 2,700-5,370; HT02 2,336.

3.4 Plasterboard: 12.5 mm wallboard to ICF faces (MR in wet rooms); 15 mm sound / fire board to party walls; 15 mm each side of the 38 x 89 stud partitions; 12.5 mm ceilings, plus VCL under the trusses. Board types are proposals.

3.5 Doors: 900 / 800 / 700 mm gaps -> 826 / 726 / 626 x 2040 leaves; no fire doors in the houses or bungalows. Cupboard ironmongery counted per leaf; flush bolt per double door (none on this job).

3.6 Sloping site: per-block FFL = mean of the four existing corner ground levels + 150 (the stepped-footing rule used in the model). Items 1C are provisional.

4 Exclusions (not measured in this package)

4.1 Nudura ICF formwork and accessories (in the Nudura price - see section 6). Concrete core, pumping, ICF / floor / roof labour and preliminaries are in the BuildEase BOQ Builder ICF + programme workbook.

4.2 Supply of windows and external doorsets and cills (listed for coordination only), roof trusses, coverings, soffits, fascias and rainwater goods, FF floor joists and deck, staircases and balustrades, ground-bearing slab / screed / floor insulation.

4.3 Floor finishes, decorations, kitchens, sanitaryware, M&E services and builder's work, external works and drainage (other than as 1C).

4.4 Fire-stopping, cavity barriers, acoustic / thermal insulation to partitions, floors and lofts, sealants and mastics, except where expressly described.

5 Items to be confirmed

5.1 SK11A and 10G are marked DRAFT - quantities follow the draft drawings and the models built from them.

5.2 External finish build-ups (brick slip and stone slip systems over ICF) and whether a full masonry outer leaf is intended.

5.3 Final external levels: 1C.1 / 1C.2 are from the existing survey and the FFL rule; re-measure on the designed levels (falls up to 2.25 m within B03 / B05 / B08).

5.4 Partition timber (5B) is an estimate - the TLSTF construction extract with cut lengths was not exported for ES26-080.

5.5 Floor-noggin blockers (FF partition lines on / beside doubled trimmers) and 6 ceiling-noggin blockers on the bungalow hip set - detail with the floor / truss designers.

5.6 Room areas agree with the drawn areas within ~0.4 m2 (finished faces from the ICF set-out on the drawn outer face) - see Schedule A.

6 What IS in the Nudura price (Quotation ES26-080)

6.1 Nudura pre-cut ICF kit for the 8 blocks / 18 plots as modelled in the BuildEase Design Suite (stepped footings per block).

6.2 Accessories: VJC clips, fibre tape, protective tape, spray foam, Form Lock and T-junction straps, end caps and lintel closures.

6.3 BuildEase Pre-Cut Service: design, coordination, installation drawings, pre-cutting and packaging of forms, field services support.

6.4 Nothing in Bills 1 to 5 of this package is included in the Nudura price.

7 Pricing instructions to tenderers

7.1 Each bill item has a SUPPLY rate and an INSTALL rate. Insert rates only in the pale-yellow cells of the Excel workbook: Supply = Site total qty x Supply rate; Install = Site total qty x Install rate; Line total = Supply + Install. Items measured as "item" are lump sums: the rate entered is the amount.

7.2 Each bill ends with a Package Summary (section subtotals for Supply / Install / Total and the package total). The Cover carries the full overview: one row per bill, grand totals, optional Preliminaries, Overheads & profit and Contingency percentages (pale-yellow cells; blank = 0) and the ICF package hook.

7.3 All other cells are locked by sheet protection (no password - Review > Unprotect Sheet if a change is genuinely needed) so formulas cannot be overwritten by accident.

7.4 Re-measure and verify all quantities before pricing or ordering. State any qualification against the item in the Notes column.

7.5 The Order guide figures and Schedules A to D are not measured bill items and must not be priced as such. All amounts exclude VAT.

BuildEase

Summary of Bills - section breakdown

ES26-080 | Land to Rear of 1-8 Wesley Terrace, Castleside | Wannop Developments Ltd - amounts by others, excl. VAT

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Bill	Section	Description	Supply £	Install £	Total £
1	1A	Brick slip system over ICF - units 01-15 (NRM2 21 / package CLD)	£0.00	£0.00	£0.00
1	1B	Stone slip / thin stone veneer system over ICF - units 16-18, block B08 (NRM2 21 / package CLD)	£0.00	£0.00	£0.00
1	1C	Sloping plots - finishes and protection below DPC (PROVISIONAL; NRM2 21 / 17)	£0.00	£0.00	£0.00
1	1D	Coordination items (supply by others)	£0.00	£0.00	£0.00
Bill 1 - External Wall Finishes - Brick & Stone Slips (package CLD)			**£0.00**	**£0.00**	**£0.00**
2	2A	Plasterboard wall linings (NRM2 28 / package DRY)	£0.00	£0.00	£0.00
2	2B	Plasterboard ceilings (NRM2 28 / package DRY)	£0.00	£0.00	£0.00
2	2C	Jointing, beads and skim (NRM2 28 / package DRY)	£0.00	£0.00	£0.00
Bill 2 - Internal Linings - Plasterboard, Tape, Beads & Skim (package DRY)			**£0.00**	**£0.00**	**£0.00**
3	3A	Internal doorsets (NRM2 24 / package JOI)	£0.00	£0.00	£0.00
3	3B	Ironmongery (NRM2 24 / package JOI)	£0.00	£0.00	£0.00
3	3C	External doorsets and windows (for information - supply by the window / door package)	£0.00	£0.00	£0.00
Bill 3 - Internal Doors & Ironmongery (package JOI)			**£0.00**	**£0.00**	**£0.00**
4	4A	Skirtings (NRM2 22 / package JOI)	£0.00	£0.00	£0.00
4	4B	Architraves (NRM2 22 / package JOI)	£0.00	£0.00	£0.00
4	4C	Window boards (NRM2 22 / package JOI)	£0.00	£0.00	£0.00
4	4D	Loft access (NRM2 22 / package JOI)	£0.00	£0.00	£0.00
Bill 4 - Joinery - Skirtings, Architraves, Window Boards & Loft Hatches (package JOI)			**£0.00**	**£0.00**	**£0.00**
5	5A	Timber stud partitions, non-loadbearing - framing (NRM2 16 / package JOI)	£0.00	£0.00	£0.00
5	5B	Partition timber - supply (NRM2 16 / package JOI)	£0.00	£0.00	£0.00
5	5C	Forming door openings in partitions (NRM2 16 / package JOI)	£0.00	£0.00	£0.00
5	5D	Pattresses, noggins to floor and roof structure, head restraint (NRM2 16 / package JOI)	£0.00	£0.00	£0.00
5	5E	Fixings and sundries (NRM2 16 / package JOI)	£0.00	£0.00	£0.00
Bill 5 - Timber Stud Partitions - Framing, Openings, Pattresses & Fixings (package JOI)			**£0.00**	**£0.00**	**£0.00**
TOTAL - finishes / ancillary trades, net (agrees with the Cover overview)			**£0.00**	**£0.00**	**£0.00**

Schedules A to D are reference schedules and are not priced. Preliminaries, overheads & profit, contingency and the ICF package (BuildEase BOQ Builder) are applied on the Cover.

Bill 1 - External Wall Finishes - Brick & Stone Slips

Finishes applied to the outer face of the ICF walls: brick slips to units 01-15, stone slips to units 16-18 (SK11A). [NRM2 21 / package CLD]

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		2	3	1	2	8						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)
1A	**Brick slip system over ICF - units 01-15 (NRM2 21 / package CLD)**												
	Brick slip system applied to the outer EPS face of the Nudura ICF (e.g. adhesive-fixed slips on a reinforced base coat, or a rail / board system - product, colour and fixing to match the SK11A brick and to be confirmed with the system supplier). Measured net of structural openings from DPC (FFL - 150) to the eaves soffit (5,320 HT01 / 2,320 HT02) and the gable rake to the drawn brick apex (8,255).												
1A.1	Brick slips to walls, Front elevation, net of openings	m2	48.51	71.68		22.00	**356.05**			£0.00	£0.00	**£0.00**	Order guide +10% = 391.7; DPC (FFL-150) to eaves / verge
1A.2	Brick slips to walls, Rear elevation, net of openings	m2	47.98	70.88		17.01	**342.62**			£0.00	£0.00	**£0.00**	Order guide +10% = 376.9; DPC (FFL-150) to eaves / verge
1A.3	Brick slips to walls, Gable elevations (end units, incl. gable triangle to the drawn apex), net of openings	m2	138.06	138.06			**690.28**			£0.00	£0.00	**£0.00**	Order guide +10% = 759.3; DPC (FFL-150) to eaves / verge
1A.4	Brick slips to walls, Side elevations (bungalow, hipped roof), net of openings	m2				35.82	**71.63**			£0.00	£0.00	**£0.00**	Order guide +10% = 78.8; DPC (FFL-150) to eaves / verge
1A.5	Brick slips to reveal returns, jambs and heads, 144 mm girth (frame set back 1/3)	m2	9.44	14.16		4.95	**71.25**			£0.00	£0.00	**£0.00**	Order guide +10% = 78.4
1A.6	Brick corner (L-shaped) slips, building external corners	m	21.88	21.88		9.88	**129.16**			£0.00	£0.00	**£0.00**	Order guide +5% = 135.6
1A.7	Brick corner slips / reveal returns at window and door jambs and heads	m	65.76	98.64		34.47	**496.38**			£0.00	£0.00	**£0.00**	Order guide +5% = 521.2
1A.8	Base support rail / starter track at DPC level, incl. weep / drip detail	m	43.40	54.75		38.60	**328.25**			£0.00	£0.00	**£0.00**	Order guide +10% = 361.1
1A.9	Head closure / stop trim at eaves soffit and along the gable verge rake	m	46.48	57.83		38.60	**343.65**			£0.00	£0.00	**£0.00**	Order guide +10% = 378.0
1A.10	Vertical movement joint at each party-wall line, front and rear faces, full height: backer rod and sealant	m	10.94	21.88			**87.52**			£0.00	£0.00	**£0.00**	Positions / spacing to the slip-system supplier (add intermediate joints if required)
1B	**Stone slip / thin stone veneer system over ICF - units 16-18, block B08 (NRM2 21 / package CLD)**												
	Natural or reconstituted stone slip (thin veneer) system to match the SK11A stone elevations for units 16-18 (block B08), adhesive or rail fixed over the ICF EPS face. Product, coursing, weight and fixing to be confirmed with the supplier and the structural engineer. Measured as 1A.												
1B.1	Stone slips to walls, Front elevation, net of openings	m2			71.68		**71.68**			£0.00	£0.00	**£0.00**	Order guide +10% = 78.8; DPC (FFL-150) to eaves / verge
1B.2	Stone slips to walls, Rear elevation, net of openings	m2			70.88		**70.88**			£0.00	£0.00	**£0.00**	Order guide +10% = 78.0; DPC (FFL-150) to eaves / verge
1B.3	Stone slips to walls, Gable elevations (end units, incl. gable triangle to the drawn apex), net of openings	m2			138.06		**138.06**			£0.00	£0.00	**£0.00**	Order guide +10% = 151.9; DPC (FFL-150) to eaves / verge
1B.4	Stone slips to reveal returns, jambs and heads, 149 mm girth (frame set back 1/3)	m2			14.65		**14.65**			£0.00	£0.00	**£0.00**	Order guide +10% = 16.1
1B.5	Stone corner (L-shaped) slips, building external corners	m			21.88		**21.88**			£0.00	£0.00	**£0.00**	Order guide +5% = 23.0
1B.6	Stone corner slips / reveal returns at window and door jambs and heads	m			98.64		**98.64**			£0.00	£0.00	**£0.00**	Order guide +5% = 103.6
1B.7	Base support rail / starter track at DPC level, incl. weep / drip detail	m			54.75		**54.75**			£0.00	£0.00	**£0.00**	Order guide +10% = 60.2
1B.8	Head closure / stop trim at eaves soffit and along the gable verge rake	m			57.83		**57.83**			£0.00	£0.00	**£0.00**	Order guide +10% = 63.6
1B.9	Vertical movement joint at each party-wall line, front and rear faces, full height: backer rod and sealant	m			21.88		**21.88**			£0.00	£0.00	**£0.00**	Positions / spacing to the slip-system supplier (add intermediate joints if required)
1C	**Sloping plots - finishes and protection below DPC (PROVISIONAL; NRM2 21 / 17)**												
	From the existing survey levels at each block corner (10G) and the stepped-footing rule FFL = mean corner ground + 150. Final external levels are not designed - re-measure on the engineer's / architect's finished levels. Per-block figures in Schedule D.												
1C.1	Exposed ICF face between DPC and existing ground on the low (fill) side: continue the slip finish down to finished ground (or below-DPC plinth finish / protection board)	m2					**83.31**			£0.00	£0.00	**£0.00**	B01 9.7; B02 8.9; B03 15.1; B04 2.7; B05 16.4; B06 6.1; B07 9.5; B08 14.9
1C.2	Ground above DPC against the ICF on the high (cut) side: waterproofing / tanking to the ICF face, protection board and perimeter drainage - or regrade to 150 below DPC	m2					**83.31**			£0.00	£0.00	**£0.00**	B01 9.7; B02 8.9; B03 15.1; B04 2.7; B05 16.4; B06 6.1; B07 9.5; B08 14.9
1D	**Coordination items (supply by others)**												
1D.1	External window cills, measured at structural opening width (for coordination with the window package)	m	14.52	21.78	21.78	6.24	**128.64**			£0.00	£0.00	**£0.00**	By window supplier - coordination only

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		2	3	1	2	8						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)

PACKAGE SUMMARY - Bill 1 External Wall Finishes - Brick & Stone Slips (package CLD; amounts by others, excl. VAT)

Section	Description	Supply £	Install £	Total £	
1A	Brick slip system over ICF - units 01-15 (NRM2 21 / package CLD)	£0.00	£0.00	**£0.00**	
1B	Stone slip / thin stone veneer system over ICF - units 16-18, block B08 (NRM2 21 / package CLD)	£0.00	£0.00	**£0.00**	
1C	Sloping plots - finishes and protection below DPC (PROVISIONAL; NRM2 21 / 17)	£0.00	£0.00	**£0.00**	
1D	Coordination items (supply by others)	£0.00	£0.00	**£0.00**	
	PACKAGE TOTAL - Bill 1, carried to the Cover overview	**£0.00**	**£0.00**	**£0.00**	

Pale-yellow cells are the only inputs (Supply rate, Install rate). Amounts, subtotals and totals are formulas; the sheet is protected without a password (Review > Unprotect Sheet). Amounts exclude VAT and are NOT part of the Nudura ICF price.

Supplied in good faith for guidance only. NOT part of the Nudura ICF price. Check and verify with the appropriate professional before use. No waste unless stated.

BuildEase

Bill 2 - Internal Linings - Plasterboard, Tape, Beads & Skim

Dry linings to the inside faces of the ICF walls, party walls, timber partitions, ceilings, reveals and stair. [NRM2 28 / package DRY]

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		**2**	**3**	**1**	**2**	**8**						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)
2A	**Plasterboard wall linings (NRM2 28 / package DRY)**												
	Measured net on the finished room faces, per unit and summed per block. Heights: HT01 GF 0 to u/s FF joists 2,425; HT01 FF deck 2,700 to u/s truss chords 5,370 (2,670); HT02 0 to u/s truss chords 2,336. Openings deducted (external openings once; internal door gaps on both faces). Board types are proposals - confirm with the board supplier; ICF faces need mechanical fixings into the webs.												
2A.1	GF external walls - internal face of the ICF: 12.5 mm wallboard, adhesive dabs + mechanical fixings to the ICF webs (MR board in WC)	m2	74.94	90.64	90.64	61.05	**634.56**			£0.00	£0.00	**£0.00**	Order guide +10% = 698.0
2A.2	FF external walls - internal face of the ICF (HT01): 12.5 mm wallboard as above (MR board in bathroom)	m2	91.82	114.08	114.08		**639.94**			£0.00	£0.00	**£0.00**	Order guide +10% = 703.9
2A.3	GF party walls (ICF 6in Std) - each house side: 15 mm sound / fire board on dabs per the ICF separating-wall detail (confirm robust detail)	m2	44.81	89.04	89.04		**445.76**			£0.00	£0.00	**£0.00**	Order guide +10% = 490.3
2A.4	FF party walls (ICF 6in Std) - each house side: 15 mm sound / fire board as above	m2	48.70	96.76	96.76		**484.46**			£0.00	£0.00	**£0.00**	Order guide +10% = 532.9
2A.5	GF timber stud partitions - both faces: 15 mm board on 38 x 89 studs (119 build-up); MR in wet rooms	m2	47.52	71.41	71.41	95.63	**571.92**			£0.00	£0.00	**£0.00**	Order guide +10% = 629.1
2A.6	FF timber stud partitions - both faces: 15 mm board on 38 x 89 studs (119 build-up); MR in wet rooms	m2	178.15	267.42	267.42		**1,425.98**			£0.00	£0.00	**£0.00**	Order guide +10% = 1,568.6
2A.7	Under-stair spandrel / store closing panel - both faces (HT01): 12.5 mm board on 38 x 63 framing (framing by the stair installer)	m2	8.92	13.45	13.45		**71.63**			£0.00	£0.00	**£0.00**	Order guide +10% = 78.8
2A.8	Internal reveals to external windows and doors, jambs and heads, 195 mm deep: 12.5 mm board / bonding and skim	m2	12.80	19.19	19.19	6.71	**115.77**			£0.00	£0.00	**£0.00**	Order guide +10% = 127.3
2A.9	Stair-well floor-zone band (2,425-2,700) on the well side and end walls: 12.5 mm board	m2	2.14	3.21	3.21		**17.13**			£0.00	£0.00	**£0.00**	HT01 only
2B	**Plasterboard ceilings (NRM2 28 / package DRY)**												
	Net plan areas of the rooms. HT01 GF ceiling is the u/s of the FF metal-web joist floor (internal floor, Part E: 40 dB - mineral wool in the joist zone is excluded); stair well deducted. Top-floor ceilings under the trusses carry a VCL. Multiply by layers for board.												
2B.1	HT01 GF ceilings, u/s FF joists (2,425): 12.5 mm wallboard (15 mm if the fire strategy requires)	m2	92.08	138.23	138.23		**737.09**			£0.00	£0.00	**£0.00**	Order guide +10% = 810.8
2B.2	HT01 FF ceilings, u/s truss bottom chords (5,370), incl. landing over the stair well: 12.5 mm board + 500g VCL	m2	94.35	141.65	141.65		**755.29**			£0.00	£0.00	**£0.00**	Order guide +10% = 830.8
2B.3	HT02 ceilings, u/s truss bottom chords (2,336): 12.5 mm board + 500g VCL	m2				71.13	**142.25**			£0.00	£0.00	**£0.00**	Order guide +10% = 156.5
2B.4	Stair soffit lining, sloping (13 treads x 288 going, 1000 wide, 33.8 deg): 12.5 mm board	m2	9.01	13.52	13.52		**72.10**			£0.00	£0.00	**£0.00**	HT01 only; winders approximated as treads
2C	**Jointing, beads and skim (NRM2 28 / package DRY)**												
2C.1	Scrim tape, board joints (walls / 1.2 m; ceilings / 1.2 + 2.4 m)	m	669.13	1,004.41	1,004.41	225.06	**5,806.03**			£0.00	£0.00	**£0.00**	Order guide +10% = 6,386.6
2C.2	Scrim tape, internal angles wall to wall	m	286.57	431.19	431.19	84.10	**2,466.09**			£0.00	£0.00	**£0.00**	Order guide +10% = 2,712.7
2C.3	Scrim tape, wall to ceiling angles	m	226.05	339.28	339.28	85.03	**1,979.26**			£0.00	£0.00	**£0.00**	Order guide +10% = 2,177.2
2C.4	Angle / corner bead, external corners in rooms	m	84.19	127.62	127.62	23.36	**725.58**			£0.00	£0.00	**£0.00**	Order guide +10% = 798.1
2C.5	Angle bead, window and door reveals (jambs and heads)	m	65.76	98.64	98.64	34.47	**595.02**			£0.00	£0.00	**£0.00**	Order guide +10% = 654.5
2C.6	Skim coat, 2-3 mm, to all net wall, reveal and ceiling board faces	m2	705.23	1,058.60	1,058.60	234.51	**6,113.88**			£0.00	£0.00	**£0.00**	Face layer only
2D	**Ordering guide (not a measured item)**												
2D.1	*Plasterboard to purchase, all types, before waste*	*m2*	*705.23*	*1,058.60*	*1,058.60*	*234.51*	*6,113.88*					*not priced*	*Order guide +10% = 6,725.3 (guide only)*

PACKAGE SUMMARY - Bill 2 Internal Linings - Plasterboard, Tape, Beads & Skim (package DRY; amounts by others, excl. VAT)

Section	Description	Supply £	Install £	Total £
2A	Plasterboard wall linings (NRM2 28 / package DRY)	£0.00	£0.00	**£0.00**
2B	Plasterboard ceilings (NRM2 28 / package DRY)	£0.00	£0.00	**£0.00**
2C	Jointing, beads and skim (NRM2 28 / package DRY)	£0.00	£0.00	**£0.00**
	PACKAGE TOTAL - Bill 2, carried to the Cover overview	**£0.00**	**£0.00**	**£0.00**

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		**2**	**3**	**1**	**2**	**8**						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)

Pale-yellow cells are the only inputs (Supply rate, Install rate). Amounts, subtotals and totals are formulas; the sheet is protected without a password (Review > Unprotect Sheet). Amounts exclude VAT and are NOT part of the Nudura ICF price.

BuildEase

Bill 3 - Internal Doors & Ironmongery

Internal doorsets and ironmongery per block; external doorsets and windows listed for coordination only. [NRM2 24 / package JOI]

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		2	3	1	2	8						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)
3A	**Internal doorsets (NRM2 24 / package JOI)**												
	From the plan door gaps (WD_partitions.json, 140 site-wide): 900 gap -> 826 x 2040 leaf; 800 -> 726; 700 -> 626. Linings 32 x 132 (119 partition + 13). Two-storey houses and bungalows: no fire doors required (no floor over 4.5 m, ADB Vol 1). Pre-hung doorsets or leaf + lining + stops; finish / style by the client.												
3A.1	Internal doorset, 626 x 2040 x 35 leaf, 32 x 132 lining set, stops, cupboard / store	nr	6.00	9.00	9.00		**48.00**			£0.00	£0.00	**£0.00**	cupboard - landing; open-plan living - under-stair store
3A.2	Internal doorset, 726 x 2040 x 35 leaf, 32 x 132 lining set, stops, cupboard / store	nr				3.00	**6.00**			£0.00	£0.00	**£0.00**	bedroom 1 - cupboard; bedroom 2 - cupboard; cupboard - open-plan living
3A.3	Internal doorset, 826 x 2040 x 35 leaf, 32 x 132 lining set, stops, bathroom / WC	nr	4.00	6.00	6.00	1.00	**34.00**			£0.00	£0.00	**£0.00**	bathroom - landing; bathroom - open-plan living; open-plan living - wc
3A.4	Internal doorset, 826 x 2040 x 35 leaf, 32 x 132 lining set, stops, habitable rooms	nr	6.00	9.00	9.00	2.00	**52.00**			£0.00	£0.00	**£0.00**	bedroom 1 - landing; bedroom 1 - open-plan living; bedroom 2 - landing; bedroom 2 - open-plan living; bedroom 3 - landing
3B	**Ironmongery (NRM2 24 / package JOI)**												
3B.1	Butt hinges, 100 mm, pairs (1.5 pair per leaf)	pr	24.00	36.00	36.00	9.00	**210.00**			£0.00	£0.00	**£0.00**	1.5 pr per leaf
3B.2	Standard sets: tubular latch, lever pair on roses	set	6.00	9.00	9.00	2.00	**52.00**			£0.00	£0.00	**£0.00**	
3B.3	Bathroom / WC sets: privacy lock, thumb-turn with emergency release, lever pair	set	4.00	6.00	6.00	1.00	**34.00**			£0.00	£0.00	**£0.00**	
3B.4	Cupboard sets PER LEAF: magnetic / roller catch and pull handle	set	6.00	9.00	9.00	3.00	**54.00**			£0.00	£0.00	**£0.00**	Per leaf (Tom 19.10)
3B.5	Door stops, floor or skirting mounted	nr	16.00	24.00	24.00	6.00	**140.00**			£0.00	£0.00	**£0.00**	One per leaf
	Flush bolts (one per double / pair door, fixed leaf): 0 - no pair doors on ES26-080 (all gaps <= 900).												
3C	**External doorsets and windows (for information - supply by the window / door package)**												
3C.1	Front entrance doorset, composite, 1,110 x 2,100 structural opening, multi-point lock, PAS 24 / SBD	nr	2.00	3.00	3.00	1.00	**18.00**			£0.00	£0.00	**£0.00**	Coordination only
3C.2	Rear bifold doorset, 3-leaf, 2,610 x 2,100 structural opening, low threshold, PAS 24	nr	2.00	3.00	3.00	2.00	**20.00**			£0.00	£0.00	**£0.00**	Coordination only
3C.3	Windows, uPVC casement (sizes in Schedule B)	nr	12.00	18.00	18.00	4.00	**104.00**			£0.00	£0.00	**£0.00**	Coordination only

PACKAGE SUMMARY - Bill 3 Internal Doors & Ironmongery (package JOI; amounts by others, excl. VAT)

Section	Description	Supply £	Install £	Total £
3A	Internal doorsets (NRM2 24 / package JOI)	£0.00	£0.00	**£0.00**
3B	Ironmongery (NRM2 24 / package JOI)	£0.00	£0.00	**£0.00**
3C	External doorsets and windows (for information - supply by the window / door package)	£0.00	£0.00	**£0.00**
	PACKAGE TOTAL - Bill 3, carried to the Cover overview	**£0.00**	**£0.00**	**£0.00**

Pale-yellow cells are the only inputs (Supply rate, Install rate). Amounts, subtotals and totals are formulas; the sheet is protected without a password (Review > Unprotect Sheet). Amounts exclude VAT and are NOT part of the Nudura ICF price.

BuildEase

Bill 4 - Joinery - Skirtings, Architraves, Window Boards & Loft Hatches

Second-fix joinery measured per room and per opening. [NRM2 22 / package JOI]

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		2	3	1	2	8						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)
4A Skirtings (NRM2 22 / package JOI)													
	Room floor perimeter on walls less every door opening into the room; stair-well edges (balustrade) and the wall beside the GF flight excluded. 18 x 94 MDF / softwood (profile by the client).												
4A.1	Skirting: HT01 GF, Living / kitchen / dining (open plan, incl. hall and stair)	m	44.56	66.90	66.90		**356.74**			£0.00	£0.00	**£0.00**	
4A.2	Skirting: HT01 GF, Under-stair store	m	8.41	12.63	12.63		**67.33**			£0.00	£0.00	**£0.00**	
4A.3	Skirting: HT01 GF, WC	m	10.36	15.56	15.56		**82.97**			£0.00	£0.00	**£0.00**	
4A.4	Skirting: HT01 FF, Bedroom 1	m	28.96	43.44	43.44		**231.66**			£0.00	£0.00	**£0.00**	
4A.5	Skirting: HT01 FF, Bedroom 2	m	29.34	44.02	44.02		**234.75**			£0.00	£0.00	**£0.00**	
4A.6	Skirting: HT01 FF, Bedroom 3	m	22.00	33.02	33.02		**176.09**			£0.00	£0.00	**£0.00**	
4A.7	Skirting: HT01 FF, Landing (incl. stair well)	m	5.89	8.86	8.86		**47.19**			£0.00	£0.00	**£0.00**	
4A.8	Skirting: HT01 FF, Cupboard / store	m	8.97	13.48	13.48		**71.88**			£0.00	£0.00	**£0.00**	
4A.9	Skirting: HT01 FF, Bathroom	m	14.01	21.04	21.04		**112.17**			£0.00	£0.00	**£0.00**	
4A.10	Skirting: HT02 GF, Bedroom 2	m				12.10	**24.21**			£0.00	£0.00	**£0.00**	
4A.11	Skirting: HT02 GF, Storage	m				4.09	**8.19**			£0.00	£0.00	**£0.00**	
4A.12	Skirting: HT02 GF, Kitchen / dining / living (open plan, incl. entrance hall)	m				25.94	**51.87**			£0.00	£0.00	**£0.00**	
4A.13	Skirting: HT02 GF, Bedroom 1	m				12.05	**24.11**			£0.00	£0.00	**£0.00**	
4A.14	Skirting: HT02 GF, Bathroom	m				9.51	**19.02**			£0.00	£0.00	**£0.00**	
4A.T	**Skirtings - total**	**m**	**172.50**	**258.95**	**258.95**	**63.70**	**1,508.20**					*not priced*	**Order guide +10% = 1,659.0**
4B Architraves (NRM2 22 / package JOI)													
	Per face = 2 legs x 2150 + (door gap + 2 x 70). Internal doors both faces; external doors inside face only (bifold heads / jambs may be plastered - confirm).												
4B.1	Architrave to internal doors, both faces, 18 x 69 (profile by the client)	m	168.48	252.72	252.72	63.48	**1,474.80**			£0.00	£0.00	**£0.00**	Order guide +10% = 1,622.3
4B.2	Architrave to external doors (front door and bifolds), inside face	m	25.20	37.80	37.80	19.65	**240.90**			£0.00	£0.00	**£0.00**	Order guide +10% = 265.0
4C Window boards (NRM2 22 / package JOI)													
	Length = structural opening width + 2 x 50 horns; depth = internal reveal 195 + 25 nosing = 220 mm (order 225 mm MDF / uPVC).												
4C.1	Window board 225 x 1,810 mm long, with horns, nosing to the front edge	nr	4.00	6.00	6.00	3.00	**38.00**			£0.00	£0.00	**£0.00**	
4C.2	Window board 225 x 1,210 mm long, with horns, nosing to the front edge	nr	6.00	9.00	9.00	1.00	**50.00**			£0.00	£0.00	**£0.00**	
4C.3	Window board 225 x 610 mm long, with horns, nosing to the front edge	nr	2.00	3.00	3.00		**16.00**			£0.00	£0.00	**£0.00**	
4C.T	**Window boards - total length**	**m**	**15.72**	**23.58**	**23.58**	**6.64**	**139.04**					*not priced*	**Order guide +10% = 152.9**
4D Loft access (NRM2 22 / package JOI)													
4D.1	Loft access hatch, insulated and draught-sealed, 600 x 600 clear between trusses (trimming by the truss designer), with ladder if required	nr	2.00	3.00	3.00	1.00	**18.00**			£0.00	£0.00	**£0.00**	One per dwelling; position to suit the truss layout - confirm

PACKAGE SUMMARY - Bill 4 Joinery - Skirtings, Architraves, Window Boards & Loft Hatches (package JOI; amounts by others, excl. VAT)

Section	Description	Supply £	Install £	Total £	
4A	Skirtings (NRM2 22 / package JOI)	£0.00	£0.00	**£0.00**	
4B	Architraves (NRM2 22 / package JOI)	£0.00	£0.00	**£0.00**	
4C	Window boards (NRM2 22 / package JOI)	£0.00	£0.00	**£0.00**	
4D	Loft access (NRM2 22 / package JOI)	£0.00	£0.00	**£0.00**	
	PACKAGE TOTAL - Bill 4, carried to the Cover overview	**£0.00**	**£0.00**	**£0.00**	

Pale-yellow cells are the only inputs (Supply rate, Install rate). Amounts, subtotals and totals are formulas; the sheet is protected without a password (Review > Unprotect Sheet). Amounts exclude VAT and are NOT part of the Nudura ICF price.

BuildEase

Bill 5 - Timber Stud Partitions - Framing, Openings, Pattresses & Fixings

Non-loadbearing 38 x 89 C16 timber stud partitions from the TLSTF models (232 walls, 496.9 m, 140 door openings site-wide). Linings are in Bill 2, doorsets in Bill 3. [NRM2 16 / package JOI]

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		2	3	1	2	8						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)
5A	**Timber stud partitions, non-loadbearing - framing (NRM2 16 / package JOI)**												
	C16 softwood stud partitions as built in the TLSTF model (232 walls site-wide, all 38 x 89 per the SK11A thin walls): studs, head and bottom rails, mid-height noggins. Measured on the wall centre line, length x full height per level (HT01 GF 2,425; HT01 FF 2,670; HT02 2,336), gross - door openings NOT deducted (forming openings is measured in 5C). Rate 5A per m2 for framing LABOUR; enter a 5A Supply rate only when pricing a composite m2 rate - otherwise price timber supply in 5B, not both. Plasterboard, tape and skim are in Bill 2.												
5A.1	HT01 ground floor partitions, 2,425 high: 38 x 89 C16 studs at 600 c/c, 38 x 89 head and bottom rails (general partitions)	m2	15.34	23.03	23.03		**122.81**			£0.00	£0.00	**£0.00**	HT01 GF: wall length x 2.425 m
5A.2	HT01 ground floor partitions, 2,425 high: 38 x 89 C16 studs at 400 c/c, 38 x 89 rails (bathroom / WC walls, pattressed)	m2	15.50	23.28	23.28		**124.14**			£0.00	£0.00	**£0.00**	HT01 GF: wall length x 2.425 m
5A.3	HT01 first floor partitions, 2,670 high: 38 x 89 C16 studs at 600 c/c, 38 x 89 head and bottom rails (general partitions)	m2	72.60	108.97	108.97		**581.09**			£0.00	£0.00	**£0.00**	HT01 FF: wall length x 2.670 m
5A.4	HT01 first floor partitions, 2,670 high: 38 x 89 C16 studs at 400 c/c, 38 x 89 rails (bathroom / WC walls, pattressed)	m2	41.82	62.76	62.76		**334.67**			£0.00	£0.00	**£0.00**	HT01 FF: wall length x 2.670 m
5A.5	HT02 ground floor partitions, 2,336 high: 38 x 89 C16 studs at 600 c/c, 38 x 89 head and bottom rails (general partitions)	m2				39.63	**79.26**			£0.00	£0.00	**£0.00**	HT02 GF: wall length x 2.336 m
5A.6	HT02 ground floor partitions, 2,336 high: 38 x 89 C16 studs at 400 c/c, 38 x 89 rails (bathroom / WC walls, pattressed)	m2				21.26	**42.51**			£0.00	£0.00	**£0.00**	HT02 GF: wall length x 2.336 m
5B	**Partition timber - supply (NRM2 16 / package JOI)**												
	ESTIMATE in linear metres of 38 x 89 C16 kiln-dried sawn softwood: common studs from the TLSTF build reports (WDP2_verify stud counts) x stud length, 2 king studs and cripples per door, head rail, bottom rail (less door gaps), door head rails and one mid-height noggin row. The TLSTF construction extract (cut lengths) was NOT exported for ES26-080 - reconcile against it before ordering. Supply only - labour in 5A / 5C.												
5B.1	38 x 89 C16 kiln-dried sawn softwood: studs, king studs and cripples over door heads	m	489.02	736.16	736.16	191.32	**4,305.29**			£0.00	£0.00	**£0.00**	Estimate - see 5B note
5B.2	38 x 89 C16 kiln-dried sawn softwood: head and bottom rails, incl. door head rails	m	111.14	166.84	166.84	52.13	**993.88**			£0.00	£0.00	**£0.00**	Estimate - see 5B note
5B.3	38 x 89 C16 kiln-dried sawn softwood: noggins (mid-height, fixing and board support)	m	42.37	63.62	63.62	20.96	**381.14**			£0.00	£0.00	**£0.00**	Estimate - see 5B note
5B.4	*38 x 89 C16 - 4.8 m lengths to order (run +5%, not cut-optimised)*	*nr*	*141.00*	*212.00*	*212.00*	*58.00*	*1,246.00*					*not priced*	*Ordering guide only - not priced in addition to the runs above*
5C	**Forming door openings in partitions (NRM2 16 / package JOI)**												
	Per opening: 2 full-height king studs, 38 x 89 head rail at 2,100 above the floor, cripple studs over the head and the bottom rail cut out across the gap. Timber is in 5B; the rate is per opening (labour; supply only for extra fixings / packers).												
5C.1	Form door opening 700 wide x 2,100 high in 89 partition (cupboard / store): 2 king studs, head rail, cripples over	nr	6.00	9.00	9.00		**48.00**			£0.00	£0.00	**£0.00**	Doorsets in Bill 3
5C.2	Form door opening 800 wide x 2,100 high in 89 partition (store / cupboard (HT02)): 2 king studs, head rail, cripples over	nr				3.00	**6.00**			£0.00	£0.00	**£0.00**	Doorsets in Bill 3
5C.3	Form door opening 900 wide x 2,100 high in 89 partition (room / bathroom door): 2 king studs, head rail, cripples over	nr	10.00	15.00	15.00	3.00	**86.00**			£0.00	£0.00	**£0.00**	Doorsets in Bill 3
5D	**Pattresses, noggins to floor and roof structure, head restraint (NRM2 16 / package JOI)**												
	From the WDP2 partition build reports. Pattress: 18 mm WBP plywood between studs on the wet-room face of the 400 c/c walls, 150-1,950 above the floor, for sanitaryware and fittings (area = WDP2 pieces x 362 clear bay x 0.9 m - two pieces per bay, split at the noggin). Floor noggins between the PS10 metal-web joists where an HT01 partition runs parallel to them. Ceiling noggins between truss bottom chords where a top-floor partition runs parallel; slotted head-restraint clips allow truss deflection.												
5D.1	18 mm WBP plywood pattress boards between studs, wet-room face, cut to fit (band 150-1,950 above floor)	m2	16.29	24.76	24.76	9.77	**151.17**			£0.00	£0.00	**£0.00**	Pieces per block: SEMI 50, TER3B 76, BUNG 30
5D.2	Noggins 47 x 250 C24 x ~301 long between FF joists over GF / FF partitions running parallel, skew-nailed or on hangers	nr	10.00	15.00	15.00		**80.00**			£0.00	£0.00	**£0.00**	HT01 only. 15 partition lines per site model reported a BLOCKER (line on / beside a doubled trimmer) - detail by the floor designer

Ref	Description	Unit	T01_SEMI per block	T01_TER3 brick per block	T01_TER3 stone per block	T02_BUNG per block	Site total qty	Supply rate £	Install rate £	Supply £	Install £	Line total £	Notes
	Number of blocks of each type (Site total = per-block qty x blocks)		**2**	**3**	**1**	**2**	**8**						Blocks: T01_SEMI = B01, B04 (plots 01-02, 09-10); T01_TER3 brick = B02, B03, B05 (plots 03-08, 11-13); T01_TER3 stone = B08 (plots 16-18); T02_BUNG = B06, B07 (plots 14, 15)
5D.3	Ceiling noggins, C24, depth to the truss bottom chord (97 HT01 / 72 HT02) x ~565 / ~490 long between chords over parallel partitions	nr	54.00	81.00	81.00	26.00	**484.00**			£0.00	£0.00	**£0.00**	HT02: 6 partition ends reported without a chord pair (blockers) - detail with the truss designer
5D.4	Partition head-restraint clip, slotted (Simpson Strong-Tie STC or UK equivalent - confirm), top-floor head rail to truss chord / noggin	nr	92.00	138.00	138.00	35.00	**806.00**			£0.00	£0.00	**£0.00**	5 mm deflection gap kept at the head
5E Fixings and sundries (NRM2 16 / package JOI)													
	Bottom rail fixings measured along the rail length (door gaps excluded). Fixing types are proposals - confirm with the designer.												
5E.1	Fix GF bottom rails to the screeded ground-bearing slab: concrete screws or shot-fired fixings at max 600 c/c, on DPC strip (confirm)	m	9.52	14.30	14.30	20.96	**118.16**			£0.00	£0.00	**£0.00**	GF bottom rail length
5E.2	Fix HT01 FF bottom rails through the deck into joists / floor noggins	m	32.85	49.32	49.32		**262.98**			£0.00	£0.00	**£0.00**	FF bottom rail length
5E.3	Head rail fixings: HT01 GF heads to joist bottom chords / floor noggins; top-floor heads via the 5D.4 clips	item								£0.00	£0.00	**£0.00**	Lump sum - the rate entered is the amount. Labour and fixings
5E.4	Nails, screws, framing fixings and sundries for the partition framing	item								£0.00	£0.00	**£0.00**	Lump sum - the rate entered is the amount.

PACKAGE SUMMARY - Bill 5 Timber Stud Partitions - Framing, Openings, Pattresses & Fixings (package JOI; amounts by others, excl. VAT)

Section	Description	Supply £	Install £	Total £
5A	Timber stud partitions, non-loadbearing - framing (NRM2 16 / package JOI)	£0.00	£0.00	**£0.00**
5B	Partition timber - supply (NRM2 16 / package JOI)	£0.00	£0.00	**£0.00**
5C	Forming door openings in partitions (NRM2 16 / package JOI)	£0.00	£0.00	**£0.00**
5D	Pattresses, noggins to floor and roof structure, head restraint (NRM2 16 / package JOI)	£0.00	£0.00	**£0.00**
5E	Fixings and sundries (NRM2 16 / package JOI)	£0.00	£0.00	**£0.00**
	PACKAGE TOTAL - Bill 5, carried to the Cover overview	**£0.00**	**£0.00**	**£0.00**

Pale-yellow cells are the only inputs (Supply rate, Install rate). Amounts, subtotals and totals are formulas; the sheet is protected without a password (Review > Unprotect Sheet). Amounts exclude VAT and are NOT part of the Nudura ICF price.

Supplied in good faith for guidance only. NOT part of the Nudura ICF price. Check and verify with the appropriate professional before use. No waste unless stated.

BuildEase

Schedule A - Floor Areas by Room

Per dwelling, measured on the finished faces of the model set-out (ICF on the drawn outer face). Not priced.

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

House type	Unit position	Level	Room	Drawn m2	Floor m2	Ceiling m2
HT01	end unit	GF	Living / kitchen / dining (open plan, incl. hall and stair)		44.90	44.90
HT01	end unit	GF	WC		2.20	2.20
HT01	end unit	GF	Under-stair store		1.83	1.83
HT01	end unit	FF	Bedroom 1	12.65	13.08	13.08
HT01	end unit	FF	Bedroom 2	12.56	12.99	12.99
HT01	end unit	FF	Bedroom 3	8.37	8.67	8.67
HT01	end unit	FF	Landing (incl. stair well)		4.16	6.92
HT01	end unit	FF	Bathroom	3.72	3.89	3.89
HT01	end unit	FF	Cupboard / store		0.90	0.90
HT01	end unit	FF	Cupboard / store		0.74	0.74
HT01	mid-terrace unit	GF	Living / kitchen / dining (open plan, incl. hall and stair)		44.96	44.96
HT01	mid-terrace unit	GF	WC		2.22	2.22
HT01	mid-terrace unit	GF	Under-stair store		1.86	1.86
HT01	mid-terrace unit	FF	Bedroom 1	12.65	13.08	13.08
HT01	mid-terrace unit	FF	Bedroom 2	12.56	12.99	12.99
HT01	mid-terrace unit	FF	Bedroom 3	8.37	8.71	8.71
HT01	mid-terrace unit	FF	Landing (incl. stair well)		4.19	6.95
HT01	mid-terrace unit	FF	Bathroom	3.72	3.91	3.91
HT01	mid-terrace unit	FF	Cupboard / store		0.90	0.90
HT01	mid-terrace unit	FF	Cupboard / store		0.75	0.75
HT02	detached	GF	Kitchen / dining / living (open plan, incl. entrance hall)	40.69	41.40	41.40
HT02	detached	GF	Bedroom 1	10.64	10.86	10.86
HT02	detached	GF	Bedroom 2	10.57	10.79	10.79
HT02	detached	GF	Bathroom	5.74	5.81	5.81
HT02	detached	GF	Storage	0.85	0.85	0.85
HT02	detached	GF	Storage	0.74	0.72	0.72
HT02	detached	GF	Storage	0.70	0.70	0.70

Drawn GIFA: HT01 96.5 m2, HT02 72.5 m2 (gross internal incl. walls); floor areas exclude the stair well.

Schedule B - Structural Opening Schedule (per block type)

From the type specs. Sill and head from FFL 0. Not priced.

DISCLAIMER: This information is supplied in good faith for guidance and coordination only. It is not part of the Nudura ICF price and must be checked and verified by the appropriate professional (quantity surveyor, designer, engineer or supplier) before use. Only the Nudura ICF formwork and associated accessories are included in our price. Quantities are measured from the quotation models and the SK11A drawings (DRAFT); no allowance for waste is included unless stated. Quantities are per block for each block type; the Site total multiplies by the number of blocks. Rates and amounts are by others.

Block type	Ref	Level	Face	Type	W mm	H mm	Sill mm	Head mm	Note
T01_SEMI	U1-L1-F01	GF	Front	window	510	1050	1050	2100	GF WC window
T01_SEMI	U1-L1-F02	GF	Front	door	1110	2100	0	2100	GF front entrance door
T01_SEMI	U1-L1-F03	GF	Front	window	1710	1050	1050	2100	GF living window (3-light)
T01_SEMI	U1-L1-R04	GF	Rear	door	2610	2100	0	2100	GF kitchen/dining bifold (3-leaf)
T01_SEMI	U1-L2-F05	FF	Front	window	1110	1050	3750	4800	FF bathroom window
T01_SEMI	U1-L2-F06	FF	Front	window	1710	1200	3600	4800	FF bedroom 1 window (3-light)
T01_SEMI	U1-L2-R07	FF	Rear	window	1110	1200	3600	4800	FF bedroom 3 window
T01_SEMI	U1-L2-R08	FF	Rear	window	1110	1200	3600	4800	FF bedroom 2 window
T01_SEMI	U2-L1-F01	GF	Front	window	510	1050	1050	2100	GF WC window
T01_SEMI	U2-L1-F02	GF	Front	door	1110	2100	0	2100	GF front entrance door
T01_SEMI	U2-L1-F03	GF	Front	window	1710	1050	1050	2100	GF living window (3-light)
T01_SEMI	U2-L1-R04	GF	Rear	door	2610	2100	0	2100	GF kitchen/dining bifold (3-leaf)
T01_SEMI	U2-L2-F05	FF	Front	window	1110	1050	3750	4800	FF bathroom window
T01_SEMI	U2-L2-F06	FF	Front	window	1710	1200	3600	4800	FF bedroom 1 window (3-light)
T01_SEMI	U2-L2-R07	FF	Rear	window	1110	1200	3600	4800	FF bedroom 3 window
T01_SEMI	U2-L2-R08	FF	Rear	window	1110	1200	3600	4800	FF bedroom 2 window
T01_TER3	U1-L1-F01	GF	Front	window	510	1050	1050	2100	GF WC window
T01_TER3	U1-L1-F02	GF	Front	door	1110	2100	0	2100	GF front entrance door
T01_TER3	U1-L1-F03	GF	Front	window	1710	1050	1050	2100	GF living window (3-light)
T01_TER3	U1-L1-R04	GF	Rear	door	2610	2100	0	2100	GF kitchen/dining bifold (3-leaf)
T01_TER3	U1-L2-F05	FF	Front	window	1110	1050	3750	4800	FF bathroom window
T01_TER3	U1-L2-F06	FF	Front	window	1710	1200	3600	4800	FF bedroom 1 window (3-light)
T01_TER3	U1-L2-R07	FF	Rear	window	1110	1200	3600	4800	FF bedroom 3 window
T01_TER3	U1-L2-R08	FF	Rear	window	1110	1200	3600	4800	FF bedroom 2 window
T01_TER3	U2-L1-F01	GF	Front	window	510	1050	1050	2100	GF WC window