

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

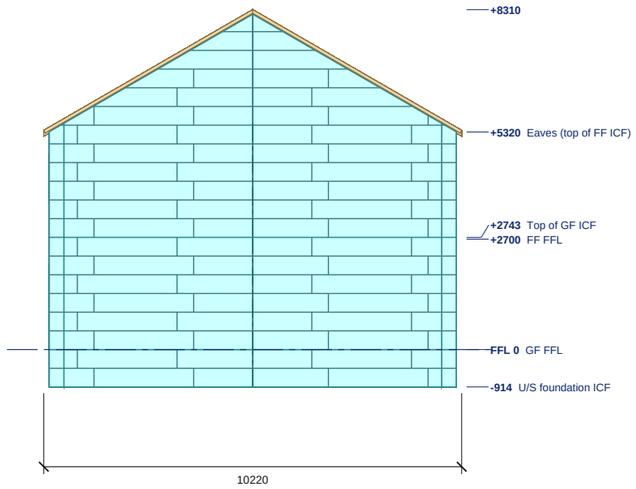

RIGHT SIDE ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

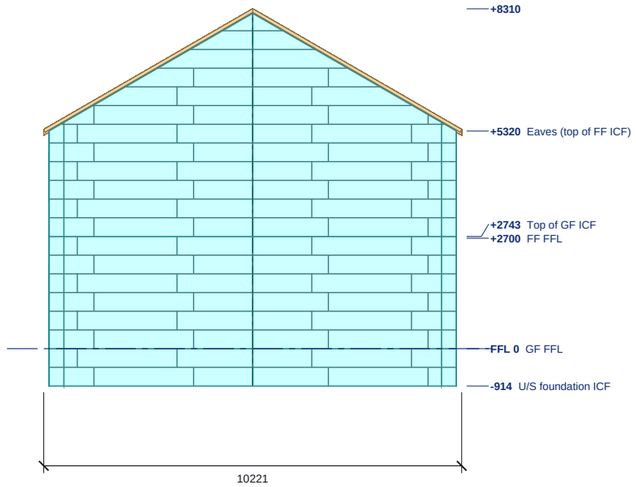

LEFT SIDE ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint

0 1 2 3 4 5 6 7 8m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

RIGHT SIDE ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

LEFT SIDE ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

RIGHT SIDE ELEVATION: LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
FF FFL	+2700
Top of GF ICF	+2743
Eaves (top of FF ICF)	+5320
top of roof build-up	+8310

LEFT SIDE ELEVATION: LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
FF FFL	+2700
Top of GF ICF	+2743
Eaves (top of FF ICF)	+5320
top of roof build-up	+8310

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-080-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE

T01 SEMI - SIDE ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	19.10.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-EL-02	Q01