
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

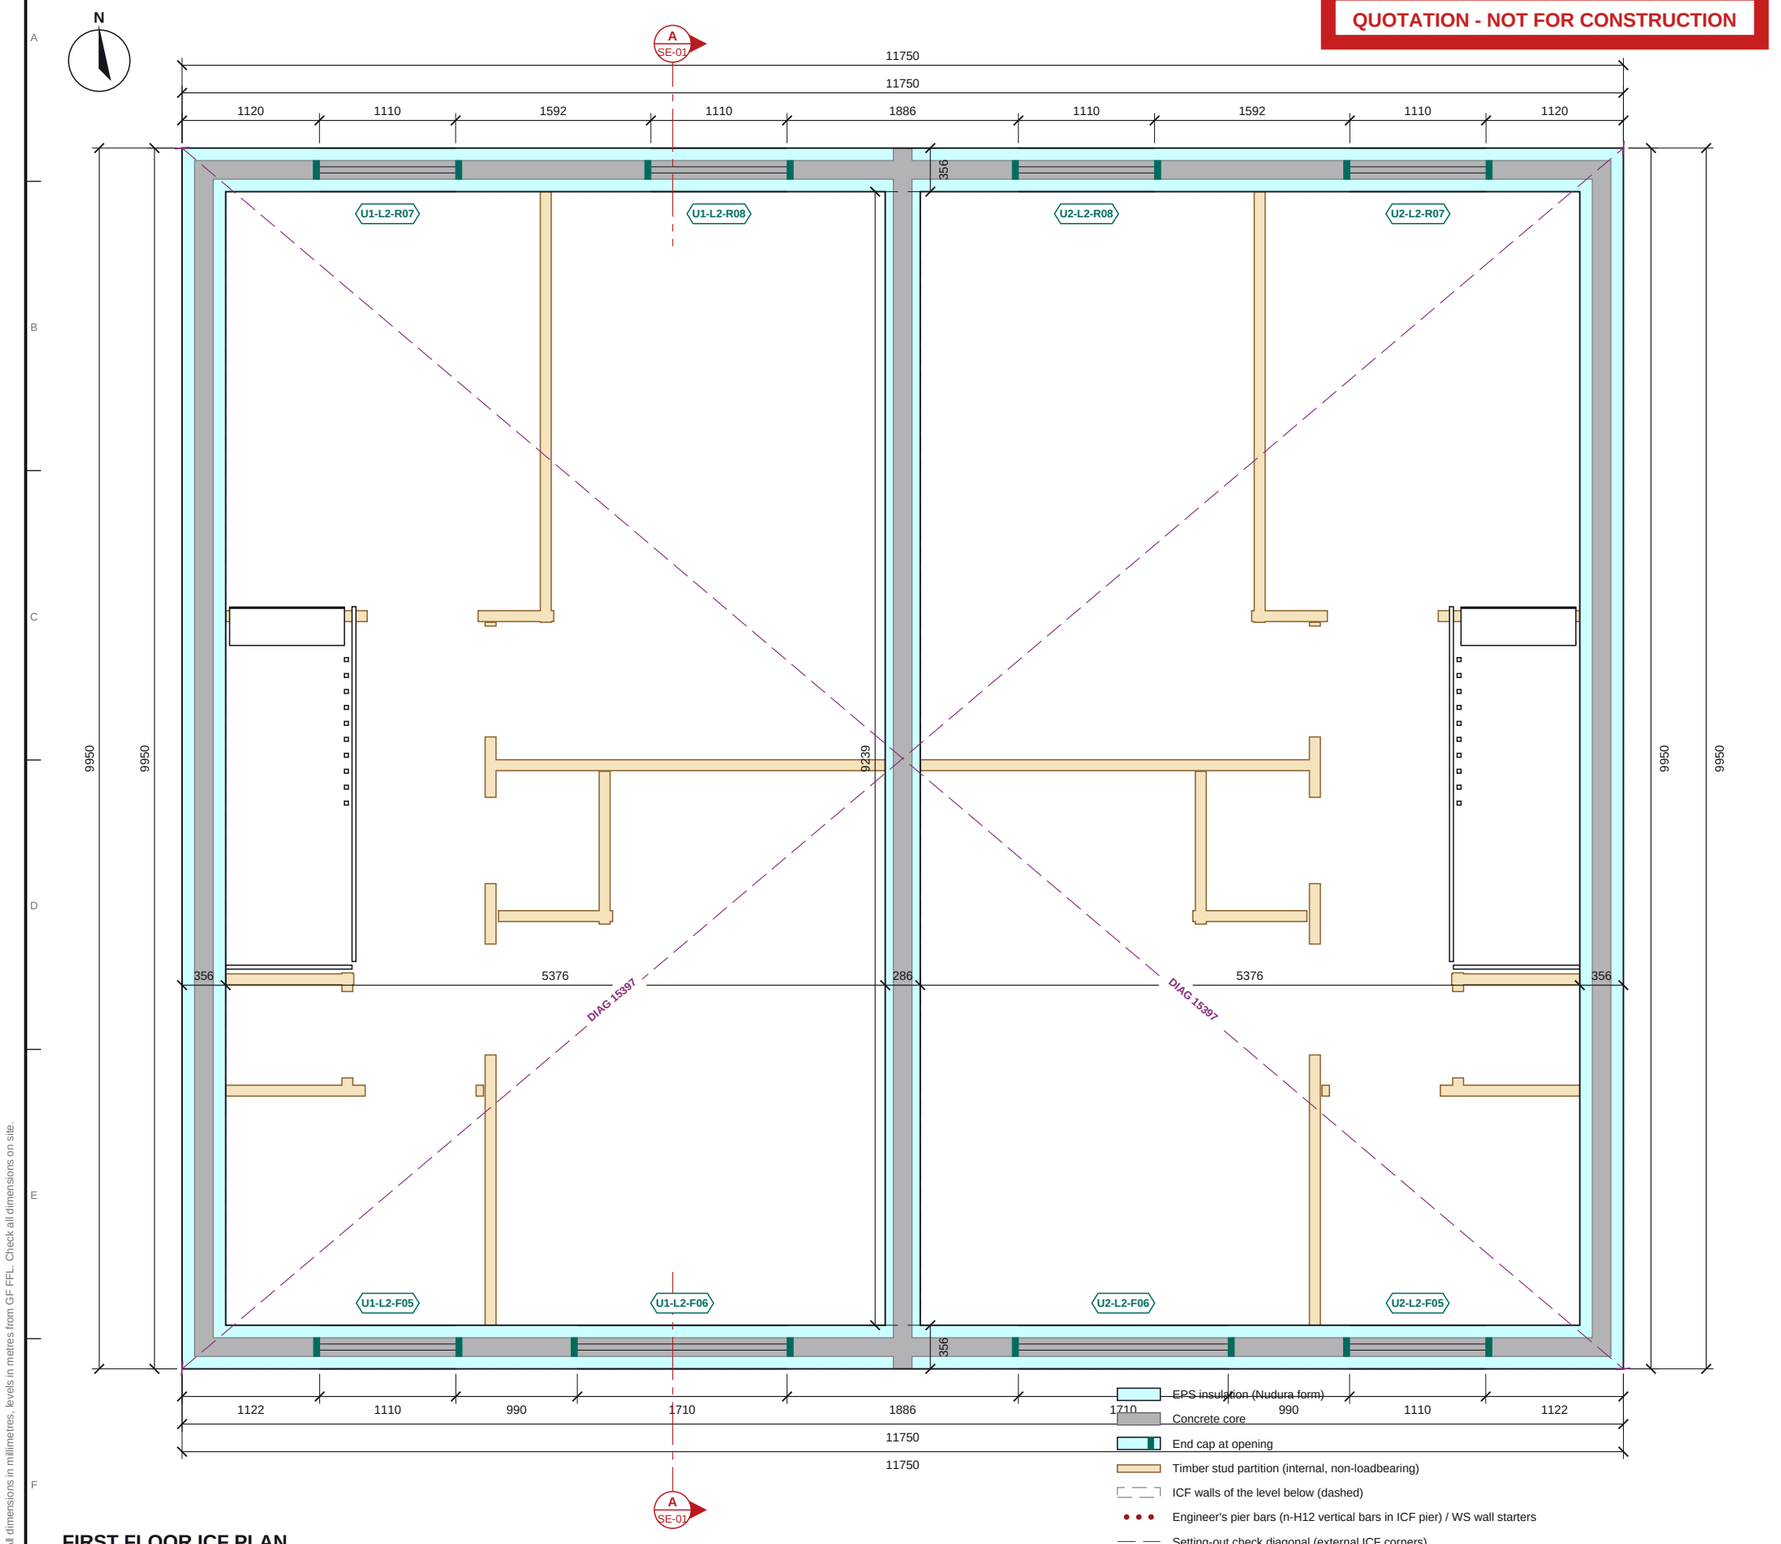

FIRST FLOOR ICF PLAN

Scale 1:50 @ A3 | Plan cut at +3343

FIRST FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
U1-L2-F05	1110	1050	+3750	+4800	-
U1-L2-F06	1710	1200	+3600	+4800	-
U1-L2-R07	1110	1200	+3600	+4800	-
U1-L2-R08	1110	1200	+3600	+4800	-
U2-L2-F05	1110	1050	+3750	+4800	-
U2-L2-F06	1710	1200	+3600	+4800	-
U2-L2-R07	1110	1200	+3600	+4800	-
U2-L2-R08	1110	1200	+3600	+4800	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard party walls. Foundation ICF stepped per block on the course grid to follow the existing ground (FFL per block = mean corner ground + 150; no proposed FFLs on 10G) - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE

T01 SEMI - FIRST FLOOR ICF

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:50	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-GA-03	Q01

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.