

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

T1 FINK (W) TRUSS - 8 No. (1:75)

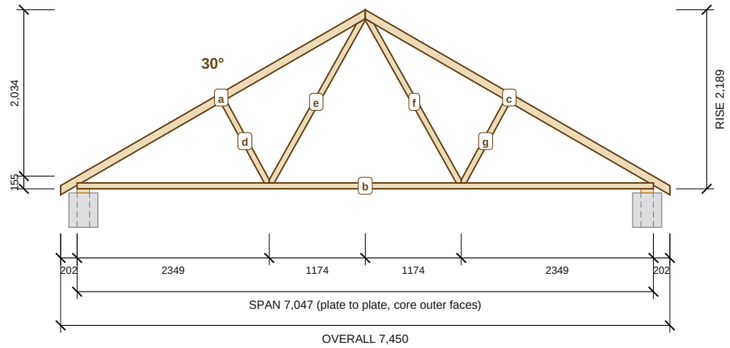

G1 2-PLY GIRDER (FINK) - 2 No. (1:75)

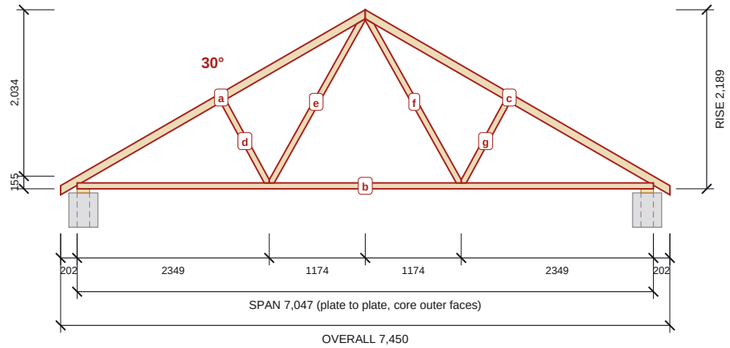

TRUSS TYPES

T1 FINK - 8 NO.

	Member	Section	Length
a	top chord	35x97 TR26	4,301
b	bottom chord	35x72 TR26	7,047
c	top chord	35x97 TR26	4,301
d	web	35x72 TR26	1,229
e	web	35x72 TR26	2,403
f	web	35x72 TR26	2,403
g	web	35x72 TR26	1,229

Span 7,047, overall 7,450, pitch 30 deg, rise 2,189, heel 155 (plate top to top of top chord over the core outer face), overhang 202 past the core face. Plate +2,336, apex +4,525.

G1 GIRDER - 2 NO.

	Member	Section	Length
a	top chord	2/35x97 TR26	4,301
b	bottom chord	2/35x72 TR26	7,047
c	top chord	2/35x97 TR26	4,301
d	web	2/35x72 TR26	1,229
e	web	2/35x72 TR26	2,403
f	web	2/35x72 TR26	2,403
g	web	2/35x72 TR26	1,229

Span 7,047, overall 7,450, pitch 30 deg, rise 2,189, heel 155 (plate top to top of top chord over the core outer face), overhang 202 past the core face. Plate +2,336, apex +4,525.

HIP-END FRAMING (AS MODELLED)

Item	Section	Length	Qty	Run m
Hip (one per corner)	75x295 C24	5,690	4	22.8
Crown rafter (one per hip end)	47x220 C24	4,301	2	8.6
Jack rafter (both slopes of each hip end)	47x220 C24	837-3,608	40	88.9
Ceiling joist (hip ends)	75x220 C24	7,047	10	70.5

Hip ends from each gable-end wall to the girders at x 3,625 / 8,425 (3,625 / 3,625 deep). Manufacturer to price as girder + mono jack trusses in shoes.

NOTES

1. FOR SUPPLIER QUOTES ONLY. The trussed rafter manufacturer designs the final trusses (members, joints, nail plates, bracing) to BS EN 1995-1-1 for the stated loads and confirms all sizes before manufacture.
2. Profiles drawn to scale from the quotation model member geometry: TR26 strength class, 35 wide members, nail-plated joints. Member marks a, b, c ... refer to the member tables.
3. Design brief (to be confirmed): concrete interlocking tiles on battens and breathable membrane, plasterboard ceiling, loft not habitable, Castleside DH8 (site ~200 m AOD, exposed): snow and wind loads to the manufacturer's site check.
4. G = 2-ply girder truss at each hip end, carrying the hip-end jack framing. The model frames the hip ends loose (hips, crowns, jacks); the manufacturer replaces them with mono jack trusses in girder shoes (Tom 19.10) - the schedule below gives the hip-end extent and lengths to price.
5. Trusses bear on 50 deep wall plates on the ICF core of the eaves walls (plate top +2,336).
6. Binders, bracing, clips and hangers are listed on ES26-080-RF-05.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE
T02 BUNGALOW - TRUSS PROFILES AND HIP-END TIMBER
Trussed rafter profiles for supplier quotation

SCALE	SIZE	DATE
AS SHOWN	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-RF-06	Q01

Do not scale. All dimensions in mm. Check all dimensions on site.