
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

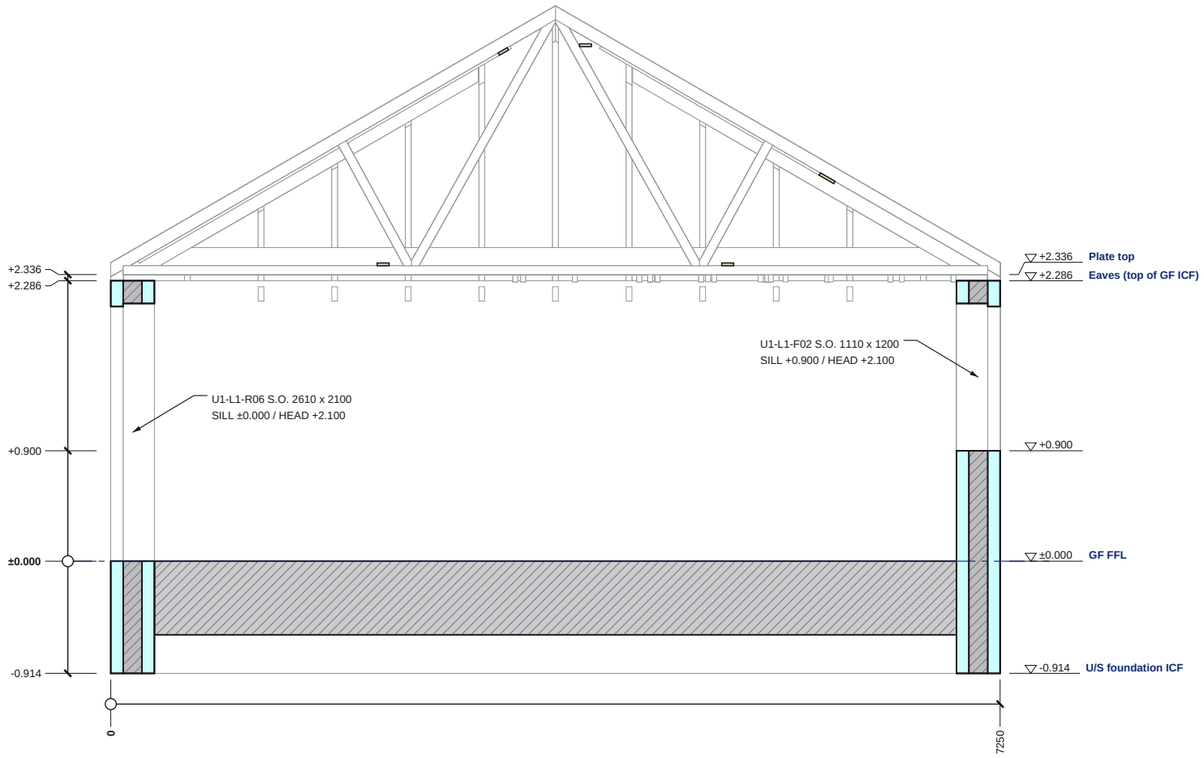

SECTION A-A

Scale 1:50 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)


0 1 2m

SECTION A-A SCHEDULES

LEVELS ON THIS SECTION

Level	FFL
U/S foundation ICF	-0.914
GF FFL	±0.000
top of ICF W04	+0.900
Eaves (top of GF ICF)	+2.286
Plate top	+2.336

SECTION KEY

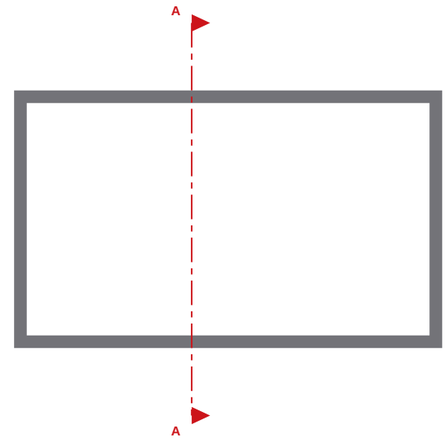

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6, 152.4 core + 101.6 EPS = 355.6. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard party walls. Foundation ICF stepped per block on the course grid to follow the existing ground (FFL per block = mean corner ground + 150; no proposed FFLs on 10G) - for the engineer's review.
4. Steel marks, BOS / TOS: rev -. See ES26-080-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE

T02 BUNGALOW - SECTION A-A

ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-SE-03	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.